


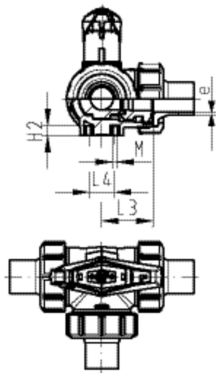


PROGEF Standard 3-Way ball valve type 543
Horizontal/L-port
With lockable handle
With butt fusion spigots IR-Plus SDR11 metric

Model:

- Material: PP-H
- For easy installation and removal (valve end and union nut are compatible with type 546)
- Ball seals PTFE
- Pneumatic or electric actuator available separately
- Angle of operation 360° without turn limiter
- Integrated stainless steel mounting inserts
- Multifunctional lever red with ratched setting 45°, lockable
- Delivery status A-C opened, see flow scheme



d	DN	Size	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
20	15	½	10	75	167 543 602	1	0.180	167 543 612	1	0.180
25	20	¾	10	150	167 543 603	1	0.258	167 543 613	1	0.258
32	25	1	10	280	167 543 604	1	0.388	167 543 614	1	0.396
40	32	1 ¼	10	480	167 543 605	1	0.645	167 543 615	1	0.645
50	40	1 ½	10	620	167 543 606	1	1.014	167 543 616	1	0.968
63	50	2	10	1230	167 543 607	1	1.876	167 543 617	1	1.876

d	D	H	H1	H2	L	L1	L2	L3	L4	L5	L6	M	e	closest
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	inch
20	50	79	28	8	146	87	72	36	25	42	45	6	2	½
25	58	88	32	8	163	108	85	43	25	50	58	6	2	¾
32	68	94	36	8	178	108	98	49	25	50	58	6	3	1
40	84	113	45	9	204	141	118	59	45	66	75	8	4	1 ¼
50	97	119	51	9	237	141	135	68	45	66	75	8	5	1 ½
63	124	141	65	9	296	165	176	88	45	78	87	8	6	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>