


Check valve type 561 ABS
Without spring
With threaded sockets Rp

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

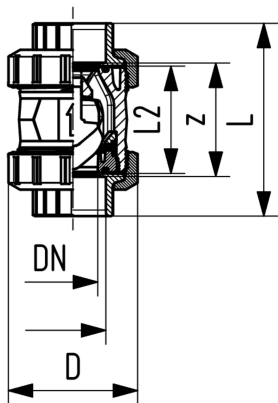

d (mm)	Thread Type	Size (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)
16	Rp	$\frac{3}{8}$	10	10	190	169 561 021	1	0.090
20	Rp	$\frac{1}{2}$	15	10	180	169 561 022	1	0.100
25	Rp	$\frac{3}{4}$	20	10	380	169 561 023	1	0.200
32	Rp	1	25	10	460	169 561 024	1	0.220
40	Rp	1 $\frac{1}{4}$	32	10	850	169 561 025	1	0.380
50	Rp	1 $\frac{1}{2}$	40	10	1080	169 561 026	1	0.580
63	Rp	2	50	10	1670	169 561 027	1	1.040

D (mm)	L (mm)	L2 (mm)	z (mm)
50	95	56	69
50	100	56	67
58	114	65	78
68	127	71	85
84	146	85	100
97	152	89	106
124	177	101	121

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>