




Diaphragm valve type 604 PVC-U Unions with solvent cement socket metric

Model:

- Compact full plastic design without screws
- High flow rate
- Actuator housing with thread for easy maintenance
- Quick opening & closing times
- For easy installation and removal
- Market standard installation length

Option:

- Individual configuration of the valve
- * O-Ring material: FKM

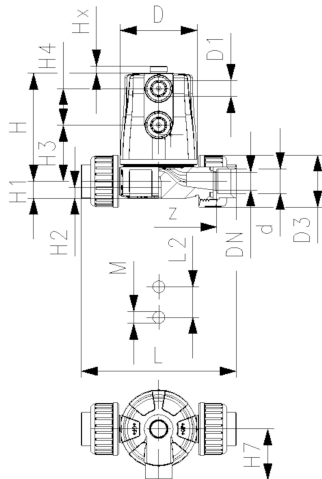

d	DN	Size	PN	kv-value	Actuator
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	
				(L/min)	

20	15	½	6	125	FC
20	15	½	6	125	FO
20	15	½	6	125	DA

EPDM Code	FKM Code	PTFE/ EPDM* Code	Weight (kg)
161 604 012	161 604 062	161 604 032	0.40
161 604 014	161 604 064	161 604 034	0.37
161 604 015	161 604 065	161 604 035	0.35

D	D1_G	D3	H	H1	H2	H3	H4	H7	L	L2	M	z	Lift = Hx
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
65	¼	43	89	14	12	46	30	42	128	25	M6	96	6
65	¼	43	89	14	12	46	30	42	128	25	M6	96	6
65	¼	43	89	14	12	46	30	42	128	25	M6	96	6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>