

THE VALVE IN DETAIL

Clever Multimach valves can be used to form autonomous and intelligent valve island subsystems. Each valve has a microchip that performs a series of functions connected with operation and dialogue with the valves before and after it. Valves communicate via serial transmission. CM refers to the communication protocol patented by Metal Work. It is a field-bus in its own right, designed specifically for very easy control of islands of pneumatic solenoid valves. CM valves have a diagnosis system that detects electrical faults. It can also be used to verify during installation that all connections are correct. Multi-pole connections and field buses with different communication protocols are available for controlling the valve distribution island. Addressing of single outputs is not required as the connection number of each solenoid pilot is assigned automatically based on the position occupied by the valve.




SMART VALVE

Each valve comes with a microchip that controls operation and dialogue with the other valves.



LOCAL DIAGNOSTICS

Each Clever Multimach valve has a LED diagnostic system that identifies immediately whether a pilot is energized, the contact is interrupted or there is a short-circuit.



LED 14	LED 12	DESCRIPTION OF THE FAULT
OFF ○	OFF ○	No fault, EV1 -EV2=OFF
ON (green) ●	OFF ○	No fault, EV1=ON - EV2=OFF
ON (green) ●	ON (green) ●	No fault, EV1-EV2=ON
OFF ○	ON (green) ●	No fault, EV1=OFF - EV2=ON
RED (flashing) ⦿	OFF ○	Solenoid pilot EV1 interrupted or disconnected
OFF ○	RED (flashing) ⦿	Solenoid pilot EV2 interrupted or disconnected
ON (red) ●	OFF ○	Solenoid pilot EV1 short circuit
OFF ○	ON (red) ●	Solenoid pilot EV2 short circuit
GREEN (flashing) ⦿	OFF ○	Data update time out, communication faulty

INPUT MODULES

With a suitably arranged Clever Center, you can insert add-on modules.
When connecting buses, the add-on modules can only be used for PNP INPUTs.
With a multi-pole connection, the following INPUTs and OUTPUTs can be used:

- DIGITAL INPUTS, as cylinder sensors for example
- DIGITAL OUTPUTS
- ANALOGUE INPUTS (but the LEDs do not light up)
- ANALOGUE OUTPUTS (but the LEDs do not light up)


They can be combined, even on the same module. You can choose between PNP or NPN connections via a dip switch-type selector.
All the INPUTS/OUTPUTS must be the same type, i.e. all PNP or NPN.



MAXIMUM EXTENSION OF ADD-ON MODULES

Up to 4 modules can be connected, giving a total of 32 input signals.

Ordering code

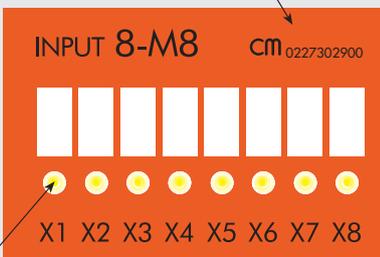


A yellow LED for each input/output
(visible for digital types)



TECHNICAL DATA

Valve port connections	Ø 4,6,8 mm automatic fitting for ports 2 and 4 / power supply port for Ø10 automatic fitting / 3/8 thread for exhaust port, M5 thread for exhaust pilot port		
Connection on the end-plate 1-11 for the supply of pilots	Automatic fitting Ø 4 mm		
Maximum number of pilots	See input end-plate technical data		
Maximum number of valves	See input end-plate technical data		
Operating temperature range	°C -10 to +60		
Fluid	Filtered air without lubrication; lubrication, if used, must be continuous		
Flow rate at 6.3 bar ΔP 1 bar	Nl/min		
	11.5 mm Ø 4	11.5 mm Ø 6	14 mm Ø 8
	200	500	650
	version 5/2 and 3/2		
	200	300	300
	version 5/3		
Pressure range	X (pilot supply)		1-11 (valve supply)
	3 to 7 bar		vacuum at 10 bar
Voltage range		3 to 7 bar	
		24 VDC ±10%	
		(slave protected against overload and reverse polarity)	
Power for each pilot	W	0.9	
Solenoid Pilot Insulation class		F155	
Degree of protection		IP65 (with conveyed exhaust, and that - in case of no use)	
Diagnostics and protections		Local via PC/PLC fault led. For defects signalled look at the manual.	
		Outlets protected against overload and short-circuit	
Solenoid rating		100% ED	
Maximum latency time of the serial transmission	ms	<10	
TRA/TRR 2x3/2 monostable at 6 bar	ms	8 / 45	
TRA/TRR 5/2 monostable at 6 bar	ms	8 / 33	
TRA/TRR 5/2 bistable at 6 bar	ms	20 / 20	
TRA/TRR 5/3 cc monostable at 6 bar	ms	20 / 20	
Note on use		Insert the pipes in the fittings, before passing air through the valves, otherwise the gasket may be pulled out of its seat by the flow of air.	
Compatibility with oils		See chapter Z1	
Add-on module			
Sensor supply voltage		24 VDC ±10%	
Maximum current for each single connector	mA	200	
Maximum current for each module	mA	400	
Maximum total current of all the modules	mA	1000	
Input impedance	KΩ	3.9	
Max input voltage	Vcc	-5 to +30	
Type of input		With field bus: PNP	
		With multi-pole connection: PNP/NPN configurable via DIP SWITCH	
Protection		Protected inputs against overload and short-circuit	
Active input signalling		One LED for each INPUT	

FIXING THE BASE

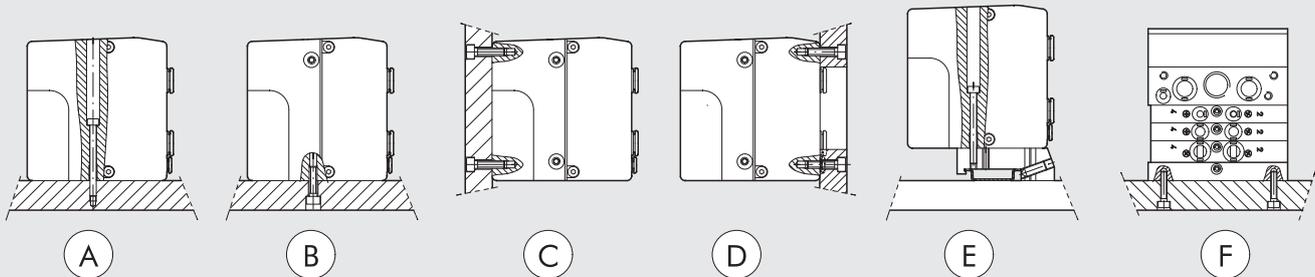

- Ⓐ Fixing from above using the 1 or 1-1 input end-plate and the blind end-plate.
 - Ⓑ Ⓒ Fixing from above using the 1 or 1-1 input end-plate and the blind end-plate, using the M5 threads on the bottom and the rear of the end-plates.
 - Ⓓ Fixing from above using the 1 or 1-1 input end-plate and the blind end-plate, using the M5 threads on the front of the end-plates.
An opening for the pipes is made in the plate.
 - Ⓔ Fixing on the DIN bar with end-plate 1 or 1-11 and blind end-plate, using the push-in bracket code 0227301600.
 - Ⓕ Lateral fixing using the blind end-plate, and its the M4 threads on the side lateral.
- Note: The sole fixing admitted is the one showed.**

KEY TO CODES – CLEVER MULTIMACH **cm**

C M	2	I / O	M	16 - W8 - W6 - O4 - L8 - 5	M8 - M8 - 15 - 16
VALVE	INPUT END-PLATE	FUNCTION	MANUAL TYPE	TYPE OF VALVE	FURTHER DETAILS
Clever Multimach	2 End-plate 1-11 3 End-plate 1	O Multi-pole connection, valves only I/O Multi-pole connection, valves and inputs ADD Additional (slave) valves only PN O Profinet IO, valves only PN I/O Profinet IO, valves and inputs EC O EtherCAT, valves only EC I/O EtherCAT, valves and inputs EN O EtherNet/IP, valves only EN I/O EtherNet/IP, valves and inputs CAN O CANopen, valves only CAN I/O CANopen, valves and inputs	M Monostable manual control B Bistable manual control	I n° 2 3/2 NC W n° 2 3/2 NO L 3/2 NO + 3/2 NC V 5/2 monostable K 5/2 bistable O 5/3 monostable 5 Blind end-plate 6 Passing-intermediate 7 Blind intermediate 20 Exhaust section 4 Cartridge 4 6 Cartridge 6 8 Cartridge 8	● M8 Module 8 input M8 * 14 Shell 44 pin * 15 Shell 44 + 44 pin 16 n° 2 brackets for DIN bar

- Not applicable with (add-on) ADD end-plate
- * For multi-pole connection only

NOTES

DISTRIBUTORS

CM CLEVER MULTIMACH

CM + MULTI-POLE CONNECTION

CM end-plates + multi-pole connection can be used for connection to the PC/PLC using a 44-pin cable and connector.
 The end-plates with provisions for INPUT/OUTPUT add-on modules are connected using an extra 44-pin cable.
 Both valves and INPUTS/OUTPUTs can be PNP or NPN configured.



DISTRIBUTORS

CM + MULTI-POLE CONNECTION


TECHNICAL DATA

Maximum number of pilots	32
Maximum number of valves	32 (same as the max. no. of pilots)
Voltage range	24VDC ±10%
DC input current without valve modules	Nominal Icc 30 mA - Instantaneous Icc (≤25 ms) 650 mA
Max input current with all valves ON	1.5 A

Refer to page B2.120 for general technical data


COMPONENTS

- ① Exhaust - Solenoid pilot 82/84
- ② Valve supply - port 1
- ③ Threaded connection of exhausts 3/5
- ④ Valve supply - port 11
- ⑤ Electrical control supply X
- ⑥ Blind end-plate
- ⑦ Screw for valve wall-mounting
- ⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
- ⑪ Manual control
- ⑫ LED (LED on, solenoid valve energised)
- ⑬ Pneumatic symbol
- ⑭ Identification of the monostable or bistable manual control
- ⑮ Valve ordering code
- ⑯ Valve identification code
- ⑰ Blank space for valve number
- ⑱ Clever Center end-plate multi-pole connection

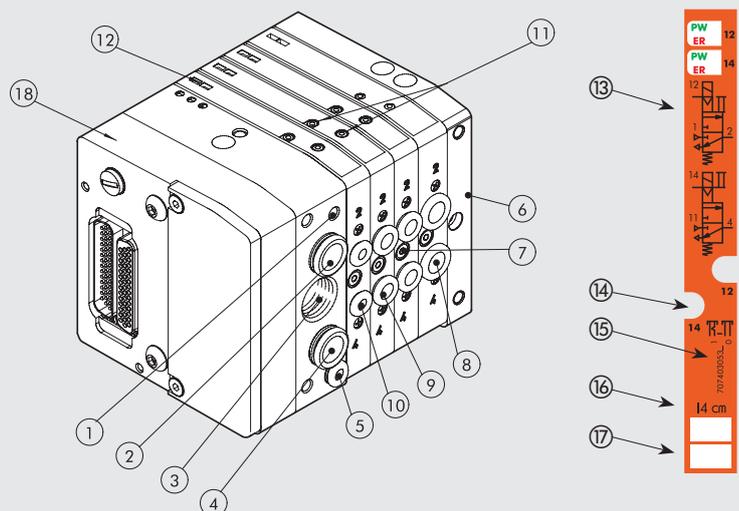

VALVE ISLAND CONFIGURATION


The numbers permit rapid identification of the function and assembly position of the single elements represented as follows. Refer to page B2.142 for valves, intermediates elements and common accessories.

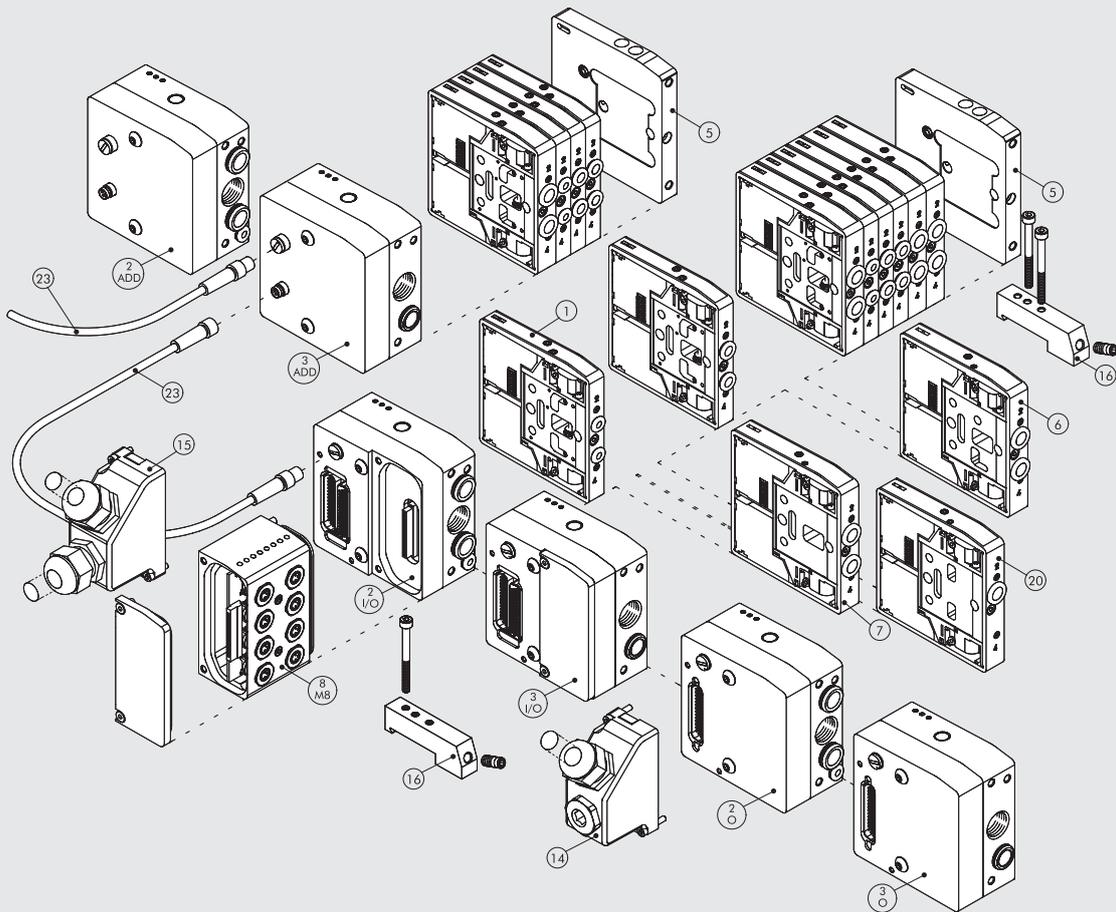


DISTRIBUTORS

CM + MULTI-POLE CONNECTION



WIRING DIAGRAM FOR THE CLEVER CENTER TERMINAL - VALVES ONLY

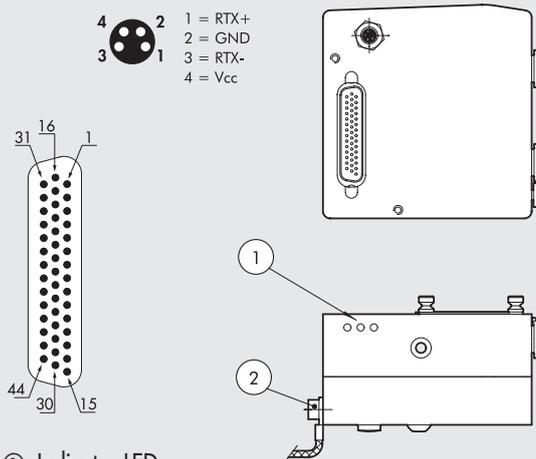


- ① Indicator LED
- ② Grounding

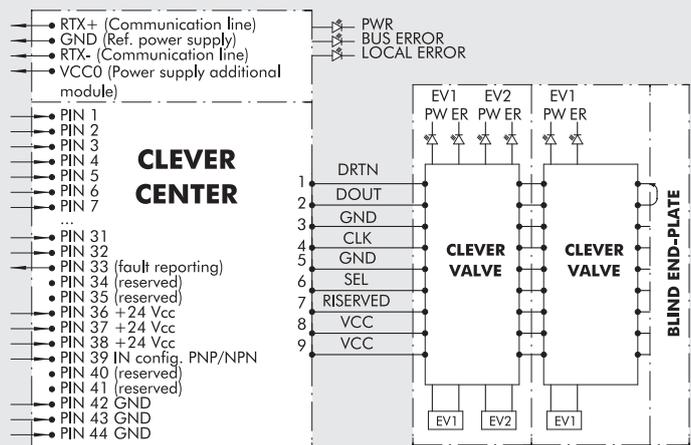

WIRING DIAGRAM FOR THE CLEVER CENTER TERMINAL FOR VALVES AND INPUTS/OUTPUTS

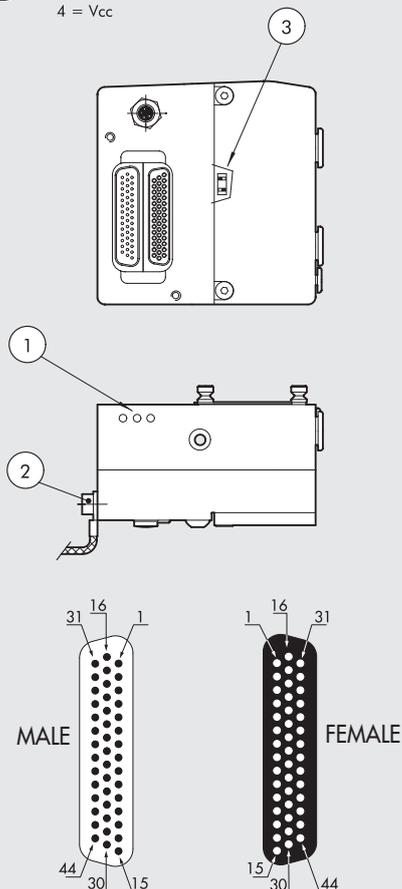


INPUT CONNECTION DIAGRAM

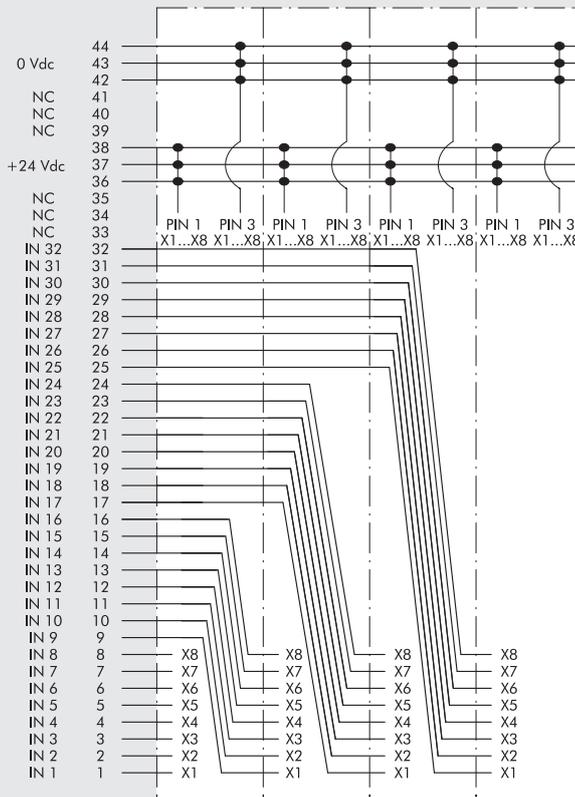


- ① Indicator LED
- ② Grounding
- ③ Input selector type PNP/NPN

2 - O OUTPUT END-PLATE 1-11

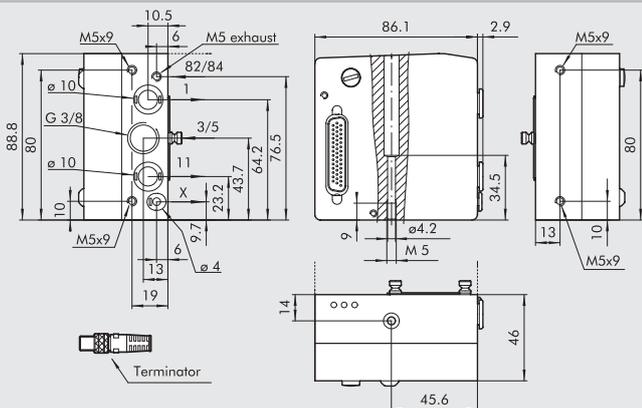


Code	Description	Weight [g]
0227302200	End-plate CM kit 1-11 OUT	722
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - O OUTPUT END-PLATE 1

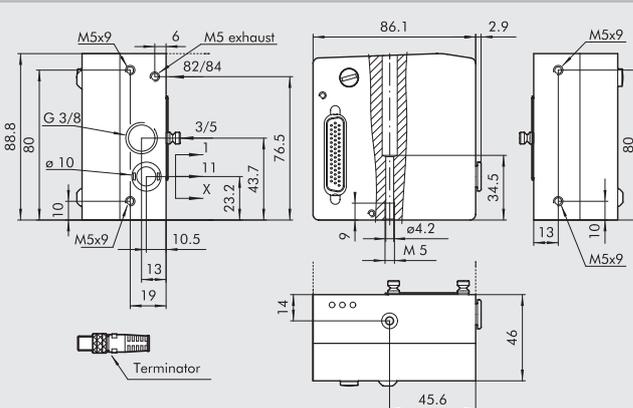


Code	Description	Weight [g]
0227302201	End-plate CM kit 1 OUT	722
Note: terminator included		

44-PIN PRE-WIRED CUP CONNECTOR



Code	Description	Weight [g]
0226950500	Connet. IP 65 + cable 44-wire L = 5 m	740

44+44-PIN PRE-WIRED CUP CONNECTOR



Code	Description	Weight [g]
0226980500	Connet. IP 65 + cable 44 + 44-wire L = 5 m	1550

WIRING DIAGRAM FOR THE 44-PIN CUP CONNECTOR KIT

44 PIN FEMALE PRE-WIRED FOR VALVE

Position of electrical contact	Corresponding wire colour	Function
1	white	Out 1
2	brown	Out 2
3	green	Out 3
4	yellow	Out 4
5	gray	Out 5
6	pink	Out 6
7	blue	Out 7
8	violet	Out 8
9	gray + pink ring	Out 9
10	red + blue ring	Out 10
11	white + green ring	Out 11
12	brown + green ring	Out 12
13	white + yellow ring	Out 13
14	yellow + brown ring	Out 14
15	white + gray ring	Out 15
16	gray + brown ring	Out 16
17	white + pink ring	Out 17
18	pink + brown ring	Out 18
19	white + blue ring	Out 19
20	brown + blue ring	Out 20
21	white + red ring	Out 21
22	brown + red ring	Out 22
23	white + black ring	Out 23
24	brown + black ring	Out 24
25	gray + green ring	Out 25
26	yellow + gray ring	Out 26
27	pink + green ring	Out 27
28	yellow + pink ring	Out 28
29	green + blue ring	Out 29
30	yellow + blue ring	Out 30
31	green + red ring	Out 31
32	yellow + red ring	Out 32
33	green + black ring	Fault reporting
34	gray + blue ring	NC
35	gray + red ring	NC
36	red + green ring	+24VDC
37	red + brown ring	+24VDC
38	red + black ring	+24VDC
39	yellow + black ring	Config. PNP/NPN
40	pink + red ring	NC
41	pink + blue ring	NC
42	black + green ring	0 VDC
43	black + pink ring	0 VDC
44	black + red ring	0 VDC

44 PIN MALE PRE-WIRED FOR INPUT/OUTPUT

Position of electrical contact	Corresponding wire colour	Function
1	white	In 1
2	brown	In 2
3	green	In 3
4	yellow	In 4
5	gray	In 5
6	pink	In 6
7	blue	In 7
8	violet	In 8
9	gray + pink ring	In 9
10	red + blue ring	In 10
11	white + green ring	In 11
12	brown + green ring	In 12
13	white + yellow ring	In 13
14	yellow + brown ring	In 14
15	white + gray ring	In 15
16	gray + brown ring	In 16
17	white + pink ring	In 17
18	pink + brown ring	In 18
19	white + blue ring	In 19
20	brown + blue ring	In 20
21	white + red ring	In 21
22	brown + red ring	In 22
23	white + black ring	In 23
24	brown + black ring	In 24
25	gray + green ring	In 25
26	yellow + gray ring	In 26
27	pink + green ring	In 27
28	yellow + pink ring	In 28
29	green + blue ring	In 29
30	yellow + blue ring	In 30
31	green + red ring	In 31
32	yellow + red ring	In 32
33	green + black ring	NC
34	gray + blue ring	NC
35	gray + red ring	NC
36	red + green ring	+24VDC
37	red + brown ring	+24VDC
38	red + black ring	+24VDC
39	yellow + black ring	NC
40	pink + red ring	NC
41	pink + blue ring	NC
42	black + green ring	0 VDC
43	black + pink ring	0 VDC
44	black + red ring	0 VDC

The CM + Profinet IO system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors. This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components from impact and falls. The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs).

Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.


N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.



TECHNICAL DATA	
Field buses	Profinet IO - 100 Mbit/s - Full-duplex Supports RT communication, Shared Device, Identification & Maintenance 1-4
Factory settings	Module name: Cmseries Address IP 0.0.0.0
Addressing	Software DCP
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64
Maximum number of valves	64 (same as the max. no. of pilots)
Maximum number of inputs (INs)	32
Icc bus supply current	Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA
Icc valve supply current	Instantaneous Icc (< 2 ms) 900 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: 2 M12 Female, D-coded, internal switch supply: M8 4 pin input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages Outputs: using local LEDs and status bytes Inputs: using local LEDs and status bytes N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled 1 = enabled
Output status in the absence of communication	Disabled
See page B2.120 for general technical data	


COMPONENTS

- ① Exhaust - Solenoid pilot 82/84
- ② Valve supply - port 1
- ③ Threaded connection of exhausts 3/5
- ④ Valve supply - port 11
- ⑤ Electrical control supply X
- ⑥ Blind end-plate
- ⑦ Screw for valve wall-mounting
- ⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
- ⑪ Manual control
- ⑫ LED (LED on, solenoid valve energised)
- ⑬ Pneumatic symbol
- ⑭ Identification of the monostable or bistable manual control
- ⑮ Valve ordering code
- ⑯ Valve identification code
- ⑰ Blank space for valve number
- ⑱ CM Profinet IO end-plate
- ⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

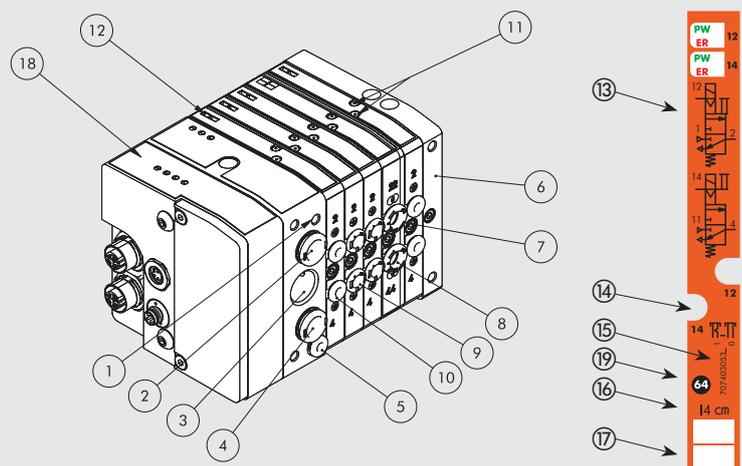


VALVE ISLAND CONFIGURATION


The numbers permit rapid identification of the function and assembly position of the single elements represented as follows. Refer to page B2.142 for valves, intermediates elements and common accessories.

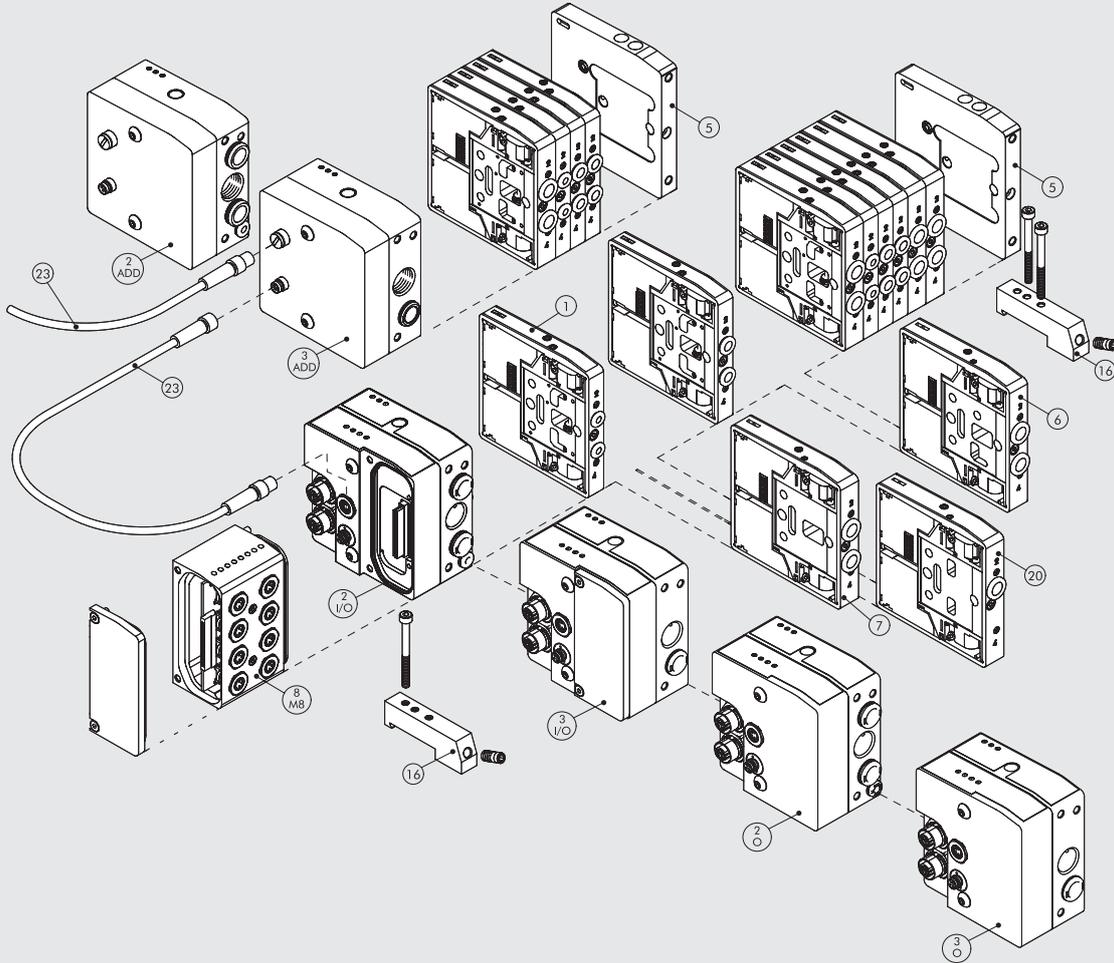

WIRING DIAGRAM

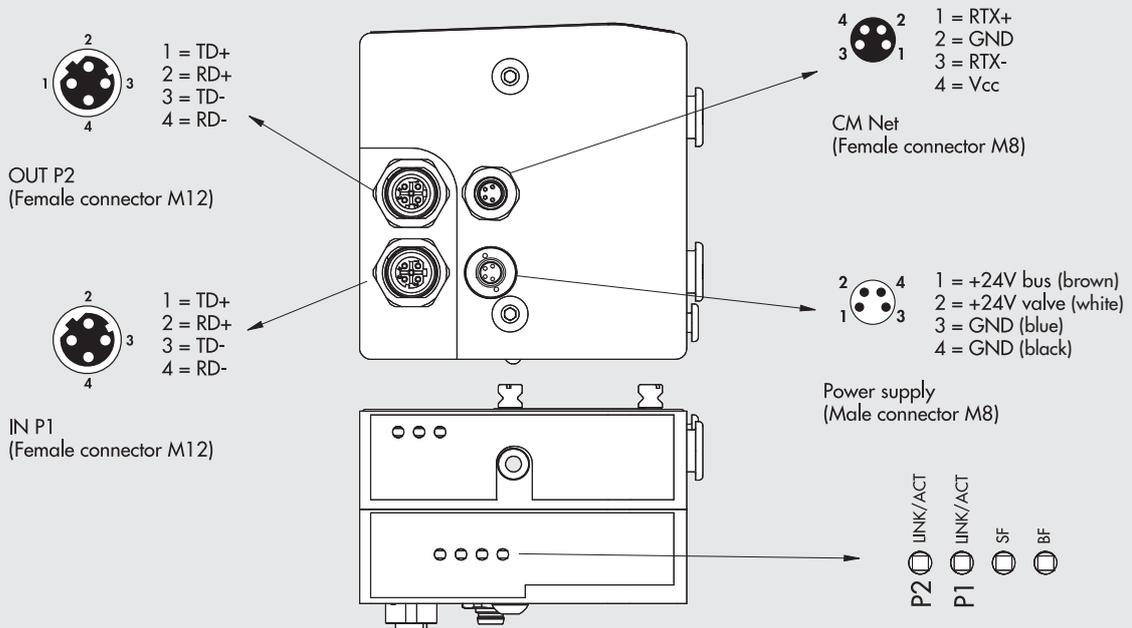


2 - 0 END-PLATE 1-11 Profinet IO OUTPUT

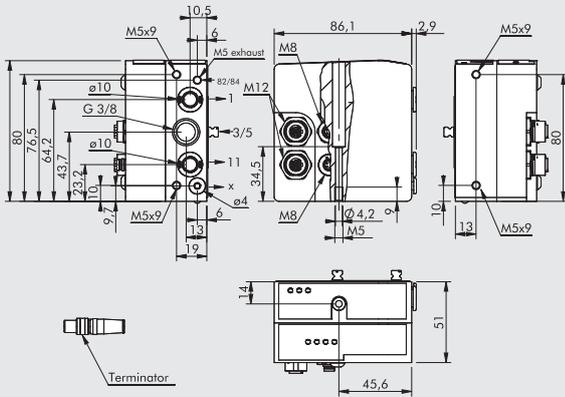


Code	Description	Weight [g]
0227302230	End-plate CM 1-11 Profinet IO OUTPUT	683
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - 0 END-PLATE 1 Profinet IO OUTPUT

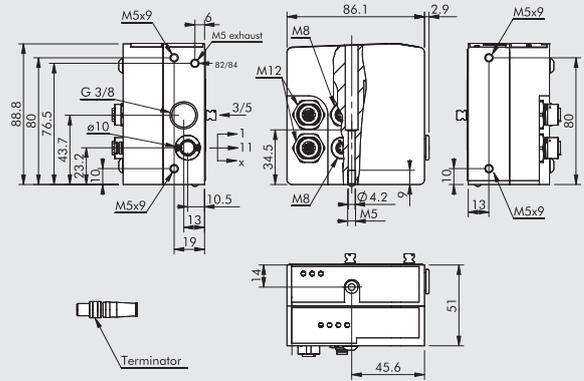


Code	Description	Weight [g]
0227302231	End-plate CM 1 Profinet IO OUTPUT	686
Note: terminator included		

2 - 1/0 END-PLATE 1-11 Profinet IO INPUT/OUTPUT

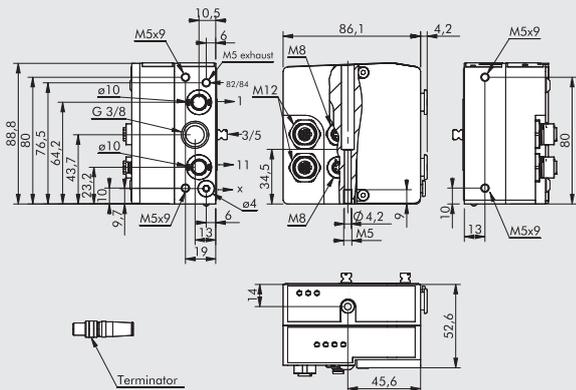

Code	Description	Weight [g]
0227302232	End-plate CM 1-11 Profinet IO IN/OUT	643
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		


3 - 1/0 END-PLATE 1 Profinet IO INPUT/OUTPUT

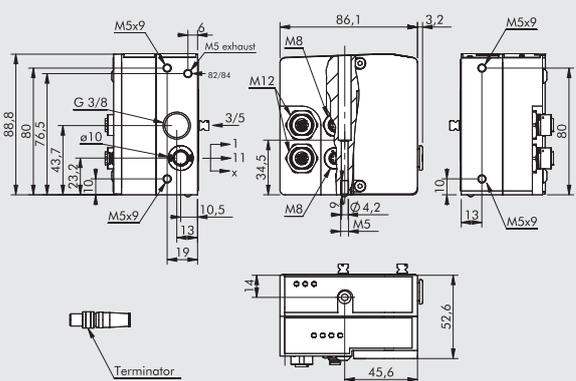

Code	Description	Weight [g]
0227302233	End-plate CM 1 Profinet IO IN/OUT	645
Note: terminator included		

M8 CONNECTOR FOR POWER SUPPLY

Pin	Cable colour
1	brown
2	white
3	blue
4	black

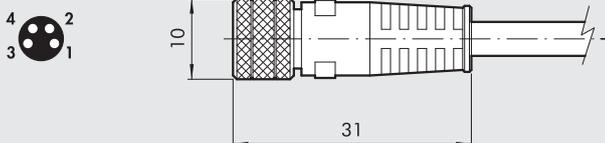

Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m

M12 PLUG



Code	Description
0240009040	Plug M12

The CM + EtherCAT system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors.

This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components from impact and falls.

The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs). Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.


N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.



TECHNICAL DATA	
Field buses	EtherCAT - 100 Mbit/s - Full-duplex - Supports auto-negotiation
Factory settings	Module name: Cmseries
Minimum cycle time	100 µs
Addressing	Autoincrement Address - Second Slave Address
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64 (8 byte)
Maximum number of valves	64 (same as the max. no. of pilots)
Maximum number of inputs (INs)	32 (4 byte + 1 status byte)
Icc bus supply current	Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA
Icc valve supply current	Instantaneous Icc (< 2 ms) 900 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: 2 M12 Female, D-coded, internal switch supply: M8 4 pin input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages Outputs: using local LEDs and status bytes Inputs: using local LEDs and status bytes N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled 1 = enabled
Output status in the absence of communication	Disabled
See page B2.120 for general technical data	


COMPONENTS

- ① Exhaust - Solenoid pilot 82/84
- ② Valve supply - port 1
- ③ Threaded connection of exhausts 3/5
- ④ Valve supply - port 11
- ⑤ Electrical control supply X
- ⑥ Blind end-plate
- ⑦ Screw for valve wall-mounting
- ⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
- ⑪ Manual control
- ⑫ LED (LED on, solenoid valve energised)
- ⑬ Pneumatic symbol
- ⑭ Identification of the monostable or bistable manual control
- ⑮ Valve ordering code
- ⑯ Valve identification code
- ⑰ Blank space for valve number
- ⑱ CM EtherCAT end-plate
- ⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

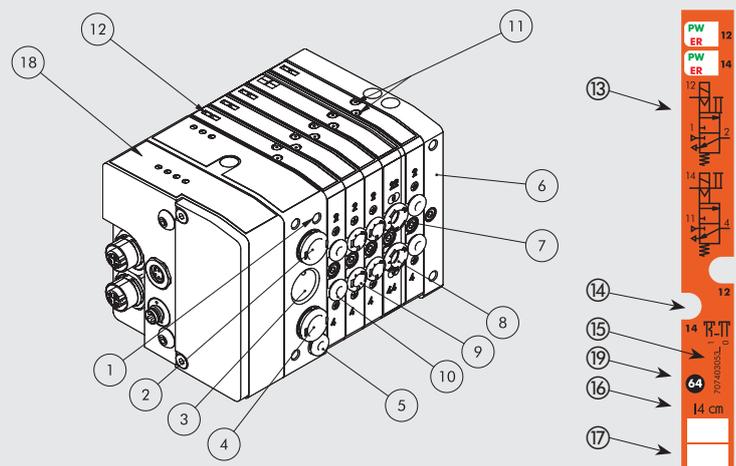


VALVE ISLAND CONFIGURATION


The numbers permit rapid identification of the function and assembly position of the single elements represented as follows. Refer to page B2.142 for valves, intermediates elements and common accessories.

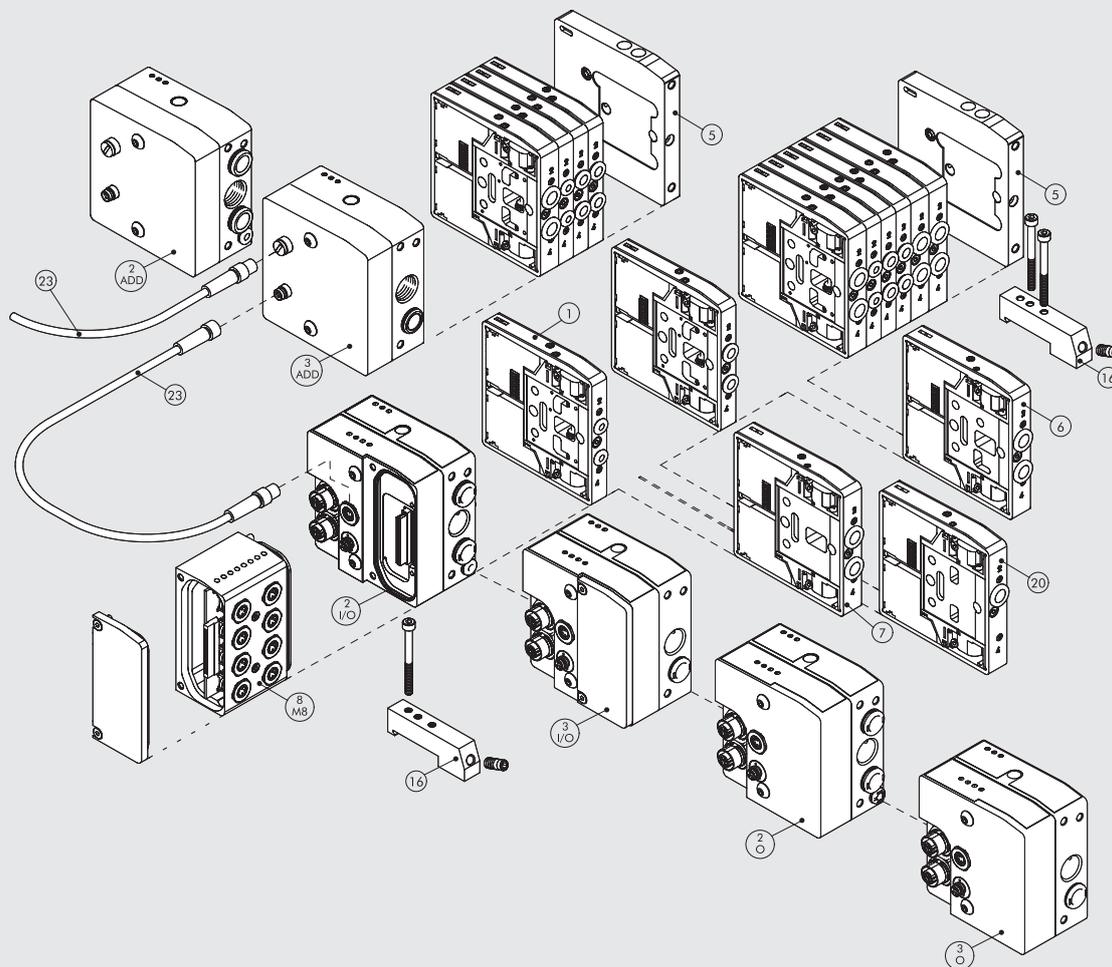

WIRING DIAGRAM

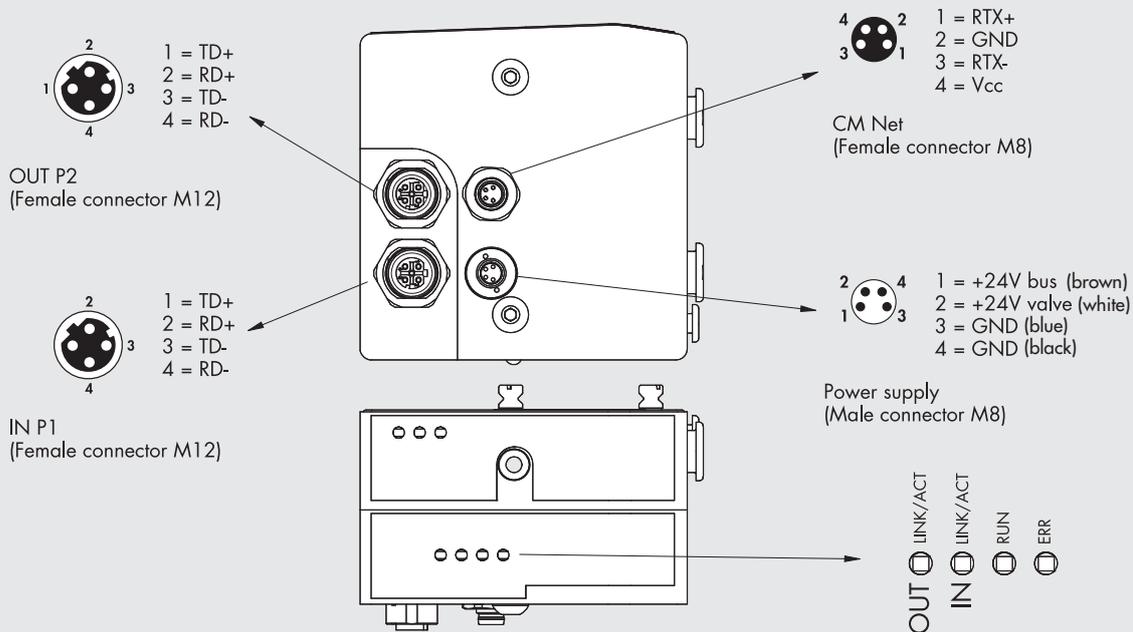


2 - O END-PLATE 1-11 EtherCAT OUTPUT

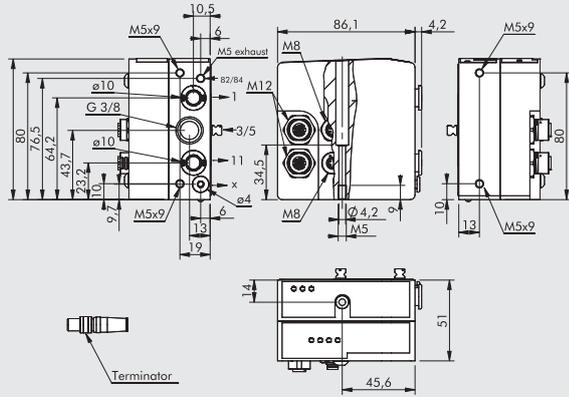


Code	Description	Weight [g]
0227302234	End-plate CM 1-11 EtherCAT OUTPUT	683
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - O END-PLATE 1 EtherCAT OUTPUT

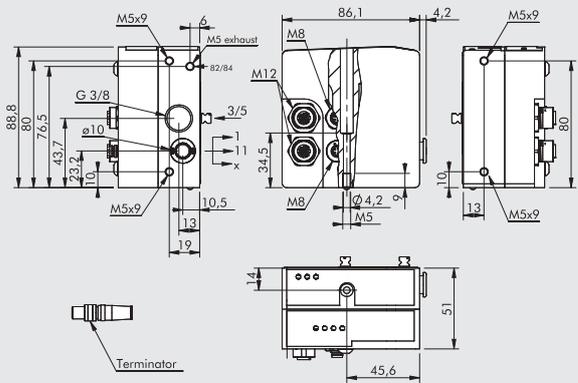


Code	Description	Weight [g]
0227302235	End-plate CM 1 EtherCAT OUTPUT	686
Note: terminator included		

2 - I/O END-PLATE 1-11 EtherCAT INPUT/OUTPUT

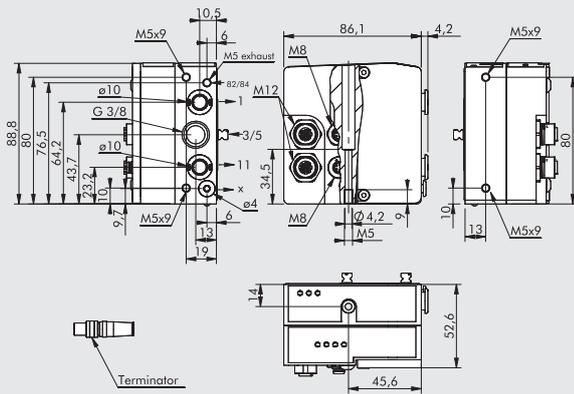


Code	Description	Weight [g]
0227302236	End-plate CM 1-11 EtherCAT IN/OUT	643
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - I/O END-PLATE 1 EtherCAT INPUT/OUTPUT

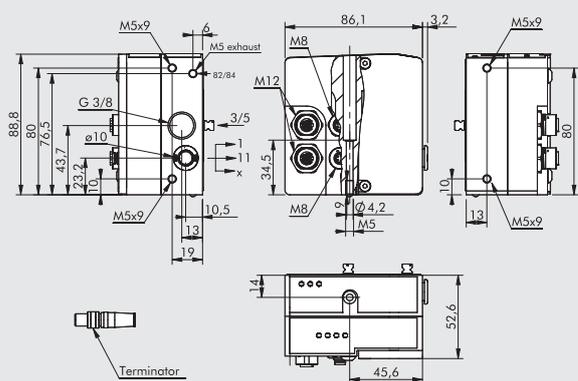

Code	Description	Weight [g]
0227302237	End-plate CM 1 EtherCAT IN/OUT	645
Note: terminator included		

M8 CONNECTOR FOR POWER SUPPLY

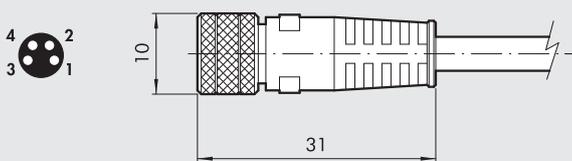

Pin	Cable colour
1	brown
2	white
3	blue
4	black

Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m

M12 PLUG



Code	Description
0240009040	Plug M12

DISTRIBUTORS

CM + EtherCAT

The CM + Ether/IP system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors. This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components from impact and falls. The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs).

Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.


N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.



TECHNICAL DATA	
Field buses	EtherNet/IP - 10/100 Mbit/s - Half-duplex - Full-duplex - Supports auto-negotiation
Factory settings	Module name: Cmseries Address IP 0.0.0.0
Addressing	Software DCP
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64
Maximum number of valves	64 (same as the max. no. of pilots)
Maximum number of inputs (INs)	32
Icc bus supply current	Nominal Icc 120 mA - Instantaneous Icc (< 2 ms) 450 mA
Icc valve supply current	Instantaneous Icc (< 2 ms) 900 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: 2 M12, D-coded, internal switch supply: M8 4 pin input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages Outputs: using local LEDs and status bytes Inputs: using local LEDs and status bytes N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled 1 = enabled
Output status in the absence of communication	Disabled
See page B2.120 for general technical data	


COMPONENTS

- ① Exhaust - Solenoid pilot 82/84
- ② Valve supply - port 1
- ③ Threaded connection of exhausts 3/5
- ④ Valve supply - port 11
- ⑤ Electrical control supply X
- ⑥ Blind end-plate
- ⑦ Screw for valve wall-mounting
- ⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
- ⑪ Manual control
- ⑫ LED (LED on, solenoid valve energised)
- ⑬ Pneumatic symbol
- ⑭ Identification of the monostable or bistable manual control
- ⑮ Valve ordering code
- ⑯ Valve identification code
- ⑰ Blank space for valve number
- ⑱ CM EtherNet/IP end-plate
- ⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

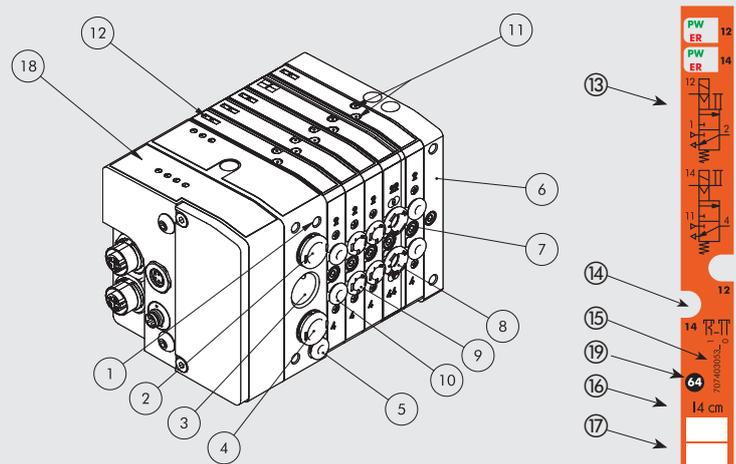


VALVE ISLAND CONFIGURATION


The numbers permit rapid identification of the function and assembly position of the single elements represented as follows.
Refer to page B2.142 for valves, intermediates elements and common accessories.

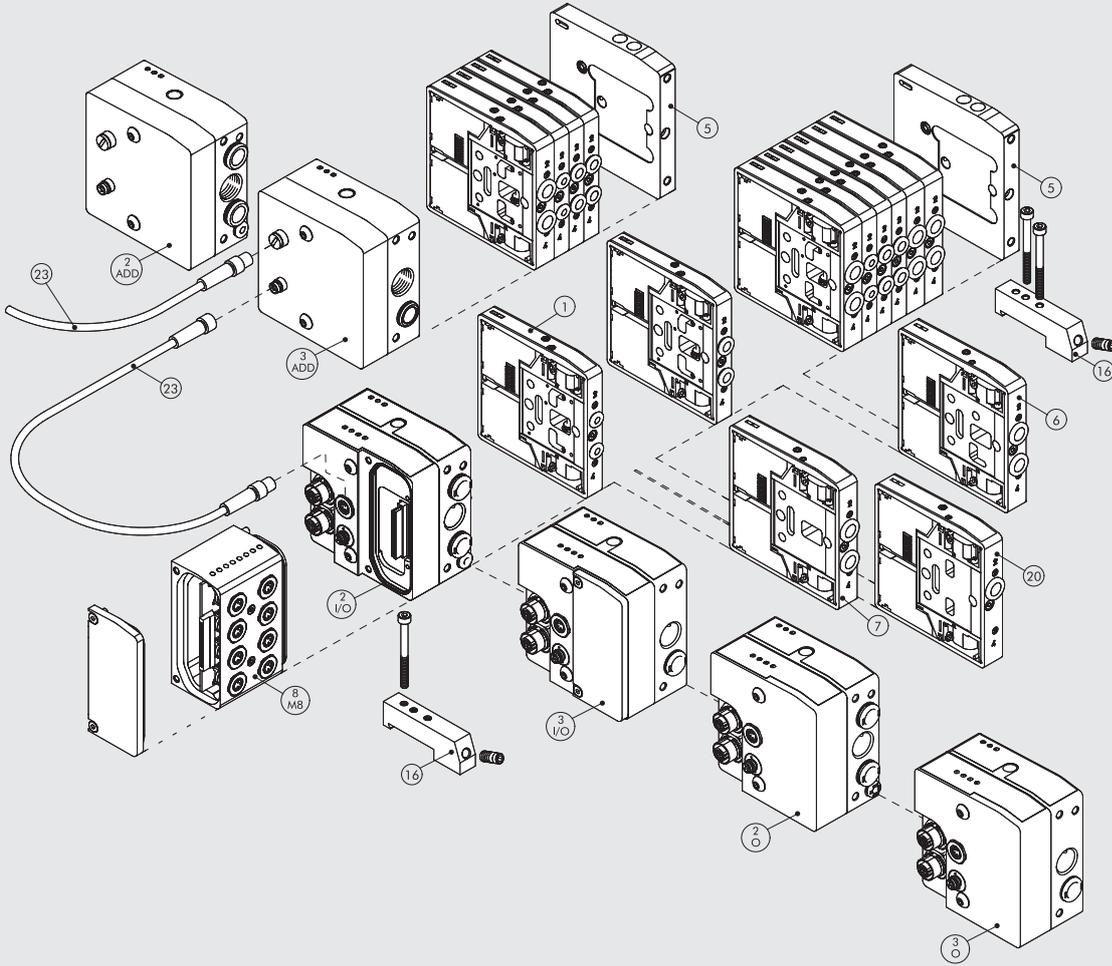

WIRING DIAGRAM

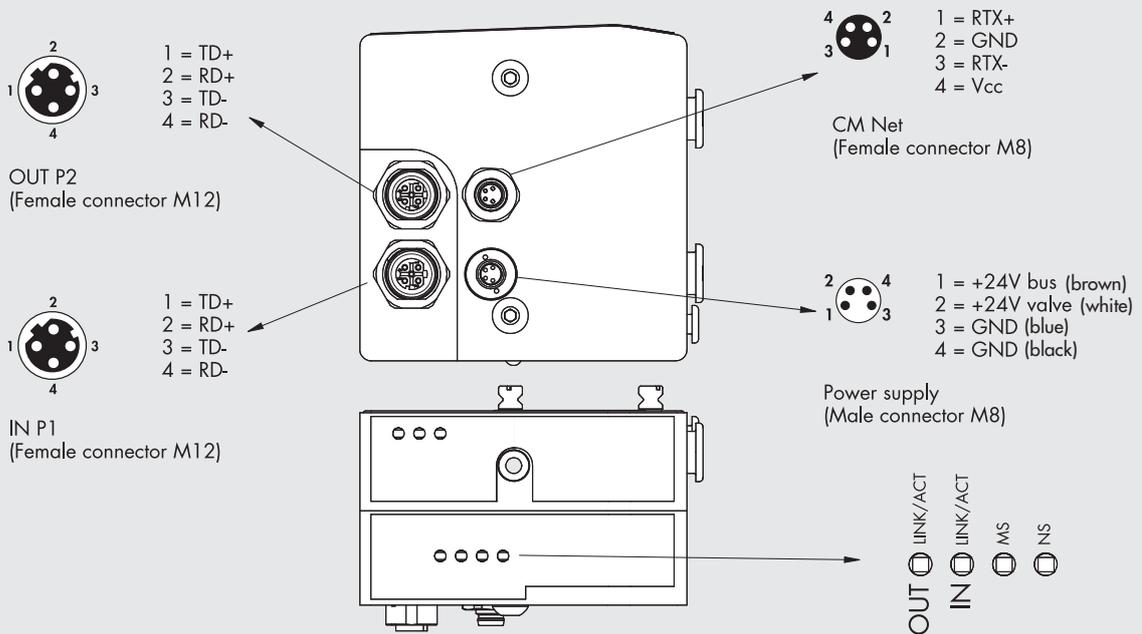


2 - O END-PLATE 1-11 EtherNet/IP OUTPUT

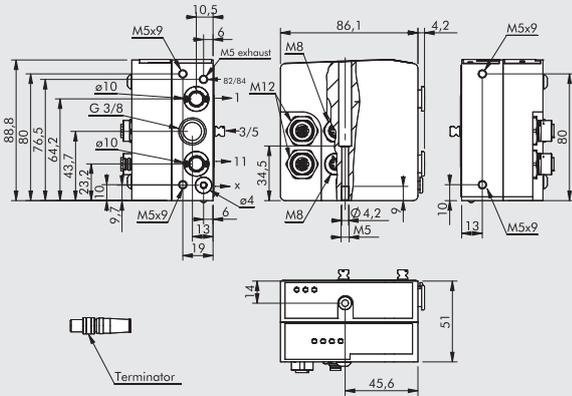


Code	Description	Weight [g]
0227302242	End-plate CM 1-11 EtherNet/IP OUTPUT	683
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - O END-PLATE 1 EtherNet/IP OUTPUT

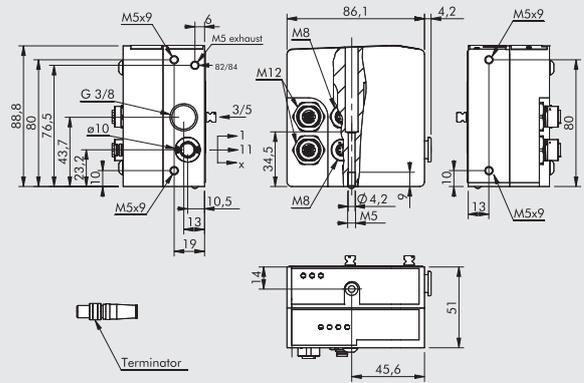


Code	Description	Weight [g]
0227302243	End-plate CM 1 EtherNet/IP OUTPUT	686
Note: terminator included		

2 - I/O END-PLATE 1-11 EtherNet/IP INPUT/OUTPUT

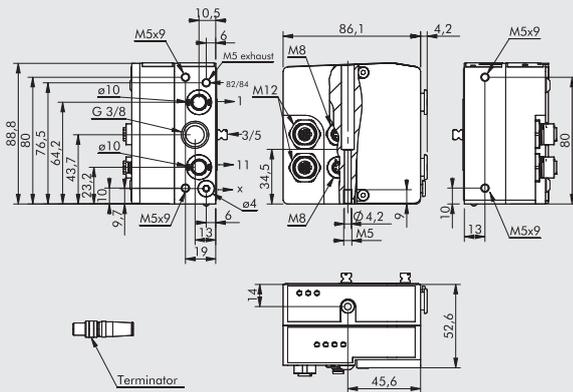


Code	Description	Weight [g]
0227302244	End-plate CM 1-11 EtherNet/IP IN/OUT	643
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - I/O END-PLATE 1 EtherNet/IP INPUT/OUTPUT

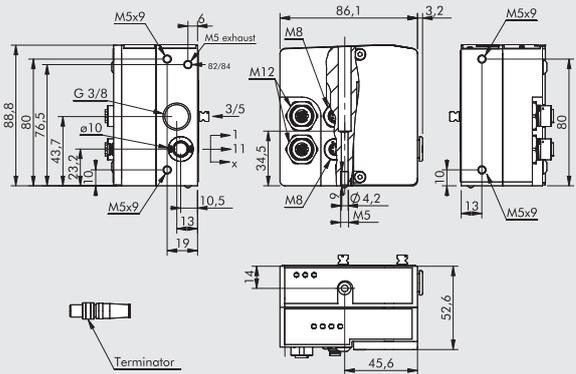

Code	Description	Weight [g]
0227302245	End-plate CM 1 EtherNet/IP IN/OUT	645
Note: terminator included		

M8 CONNECTOR FOR POWER SUPPLY

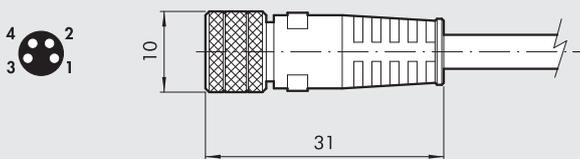

Pin	Cable color
1	Brown
2	White
3	Blue
4	Black

Code	Description
0240009060	M8 4-pin female connector for power supply, cable L = 3 m
0240009037	M8 4-pin female connector for power supply, cable L = 5 m
0240009058	M8 4-pin female connector for power supply, cable L = 10 m
0240009059	M8 4-pin female connector for power supply, cable L = 15 m

M12 PLUG



Code	Description
0240009040	Plug M12

The CM+CANopen system has been designed with a pneumatic input end-plate that can contain all the electronic equipment, indicators and connectors. This system is very compact and sturdy and is housed in a thick aluminium body that protects sensitive components impact and falls. The end-plate is available in two electric versions: one handling up to 64 solenoids (64 OUTs) and one handling up to 64 solenoids (64 OUTs) and 32 inputs (32 INs).

Grounding is recommended to protect the electronic circuit against electric or electrostatic charges.


N.B. For the system to handle more than 32 pilots (33 to 64), it must be made up of valves bearing a label marked 64. If one or more valves are not marked 64, each island cannot handle more than 32 pilots.



TECHNICAL DATA	
Field buses	CANopen - Complies with CiA DS401 specifications
Factory settings	Module name: Cmseries Address 4
Addressing	Hardware via dip Switch
Voltage range	24VDC ± 10%
Maximum number of pilots (Out)	64
Maximum number of valves	* 64 (same as the max. no. of pilots)
Maximum number of inputs (INs)	32
Icc bus supply current	Nominal Icc 30 mA - Instantaneous Icc (< 5 ms) 640 mA
Icc valve supply current	Instantaneous Icc (< 5 ms) 1100 mA
Maximum absorption of a valve island with 64 monostable valves	Nominal Icc with 900 mA OFF valves – nominal Icc with 2700 mA ON valves
Protections	Module protected against overload and polarity reversal. Outputs protected against overloads and short-circuits
Connections	Field bus: M12 Male inputs, 5 pins, A-coded; M12 Female outputs, 5 poles, A-coded supply: M8 4 pin input: M8 3 pin
BUS diagnostics	Using local LEDs and software messages Outputs: using local LEDs and status bytes Inputs: using local LEDs and status bytes N.B.: Refer to the user manual for a detailed description
Data bit value	0 = not enabled 1 = enabled
Output status in the absence of communication	Disabled
* N.B.: In case of "slaves" islands, the CANopen "clever center" can contain up to 34 valves (pilots can be even up to 64). See page B2.120 for general technical data	


COMPONENTS

- ① Exhaust - Solenoid pilot 82/84
- ② Valve supply - port 1
- ③ Threaded connection of exhausts 3/5
- ④ Valve supply - port 11
- ⑤ Electrical control supply X
- ⑥ Blind end-plate
- ⑦ Screw for valve wall-mounting
- ⑧ ⑨ ⑩ Utility port for pipe Ø 4, 6 or 8 mm
- ⑪ Manual control
- ⑫ LED (LED on, solenoid valve energised)
- ⑬ Pneumatic symbol
- ⑭ Identification of the monostable or bistable manual control
- ⑮ Valve ordering code
- ⑯ Valve identification code
- ⑰ Blank space for valve number
- ⑱ CM CANopen end-plate
- ⑲ 64 = when present, it means that the valve is suitable for installation on islands with a field bus with up to 64 pilots, otherwise the limit is 32 pilots.

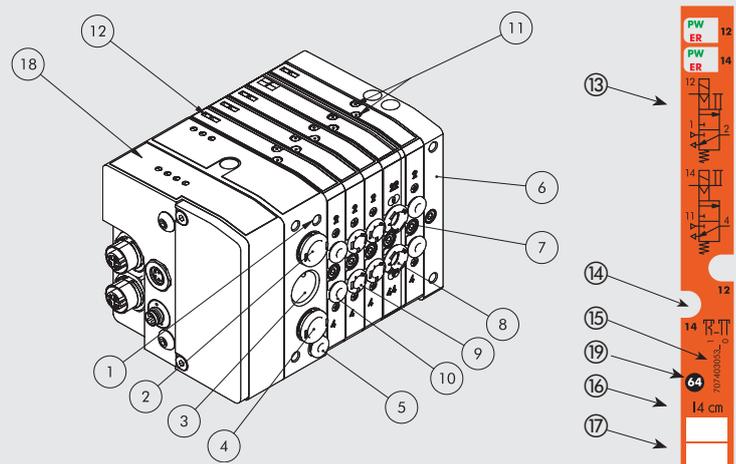


VALVE ISLAND CONFIGURATION


The numbers permit rapid identification of the function and assembly position of the single elements represented as follows. Refer to page B2.142 for valves, intermediates elements and common accessories.

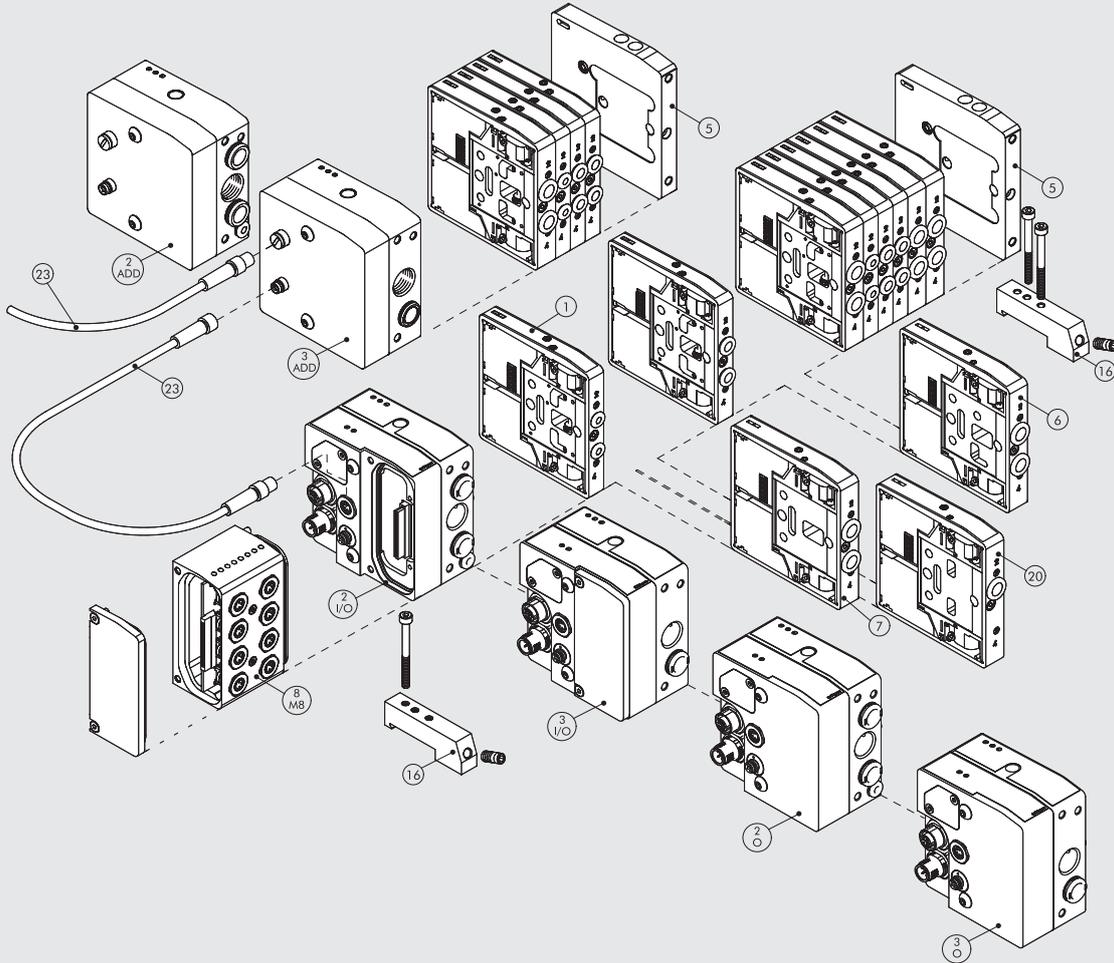

WIRING DIAGRAM

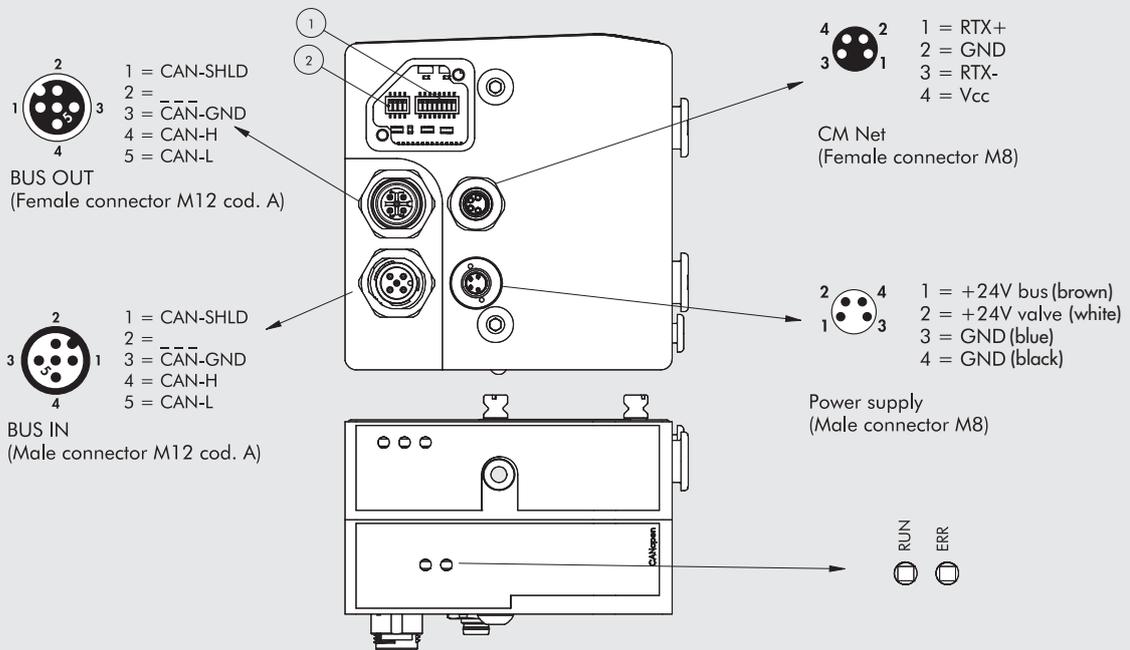


2 - O END-PLATE 1-11 CANopen OUTPUT

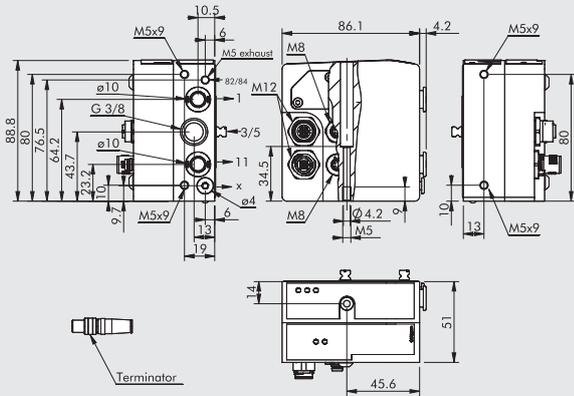


Code	Description	Weight [g]
0227302238	End-plate CM 1-11 CANopen OUTPUT	678
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - O END-PLATE 1 CANopen OUTPUT

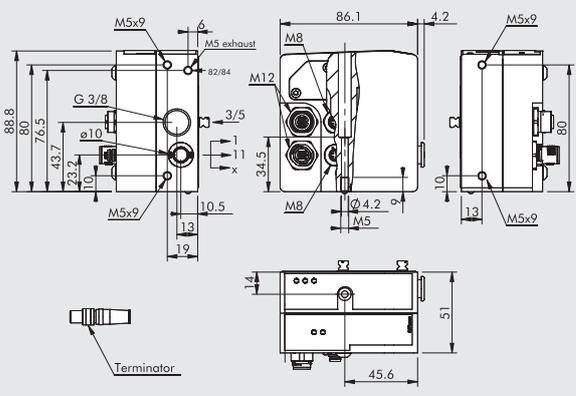


Code	Description	Weight [g]
0227302239	End-plate CM 1 CANopen OUTPUT	680
Note: terminator included		

2 - I/O END-PLATE 1-11 CANopen INPUT/OUTPUT

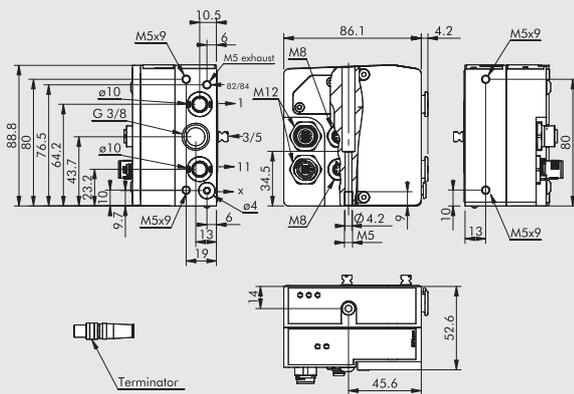


Code	Description	Weight [g]
0227302240	End-plate CM 1-11 CANopen IN/OUT	632
This end-plate allows for supplies to be differentiated: port 2, port 4 and pilot supply		
Note: terminator included		

3 - I/O END-PLATE 1 CANopen INPUT/OUTPUT

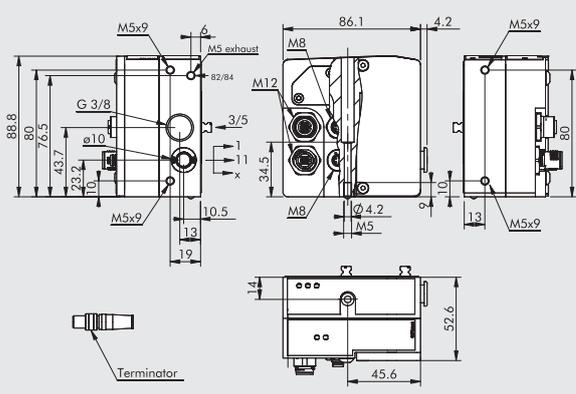


Code	Description	Weight [g]
0227302241	End-plate CM 1 CANopen IN/OUT	635
Note: terminator included		

FEMALE CONNECTOR FOR CANopen BUS-IN

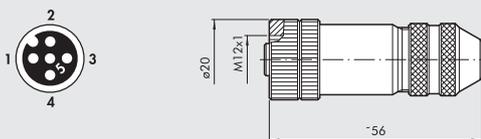


Code	Description
0240009055	M12 female connector, A-coded

MALE CONNECTOR FOR CANopen BUS-OUT

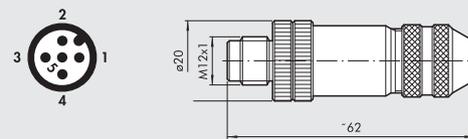

Code	Description
0240009038	M12 male connector, A-coded

CABLE FOR CANopen BUS




Code	Description
0240005250	Cable for CANopen bus 20 m

NOTES

CM - VALVES, INTERMEDIATES ELEMENTS AND ACCESSORIES


CM valve can be included in islands with any available input terminal. The same valve can be connected to the multiple connection end-plate and all the field bus end-plates.

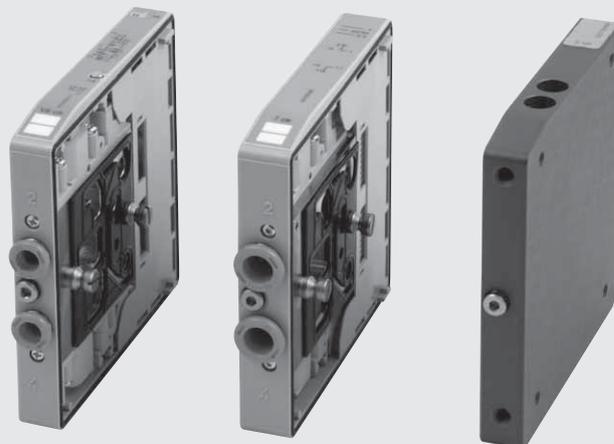

DISTRIBUTORS


CM - VALVES, INTERMEDIATES ELEMENTS AND ACCESSORIES

MANUAL CONTROLS



MONOSTABLE OVERRIDE PORT 2
servo-assisted

- Press and hold the manual control in position (not necessary for bistable type K valve)
- Release the manual control:
 - The manual control returns to the home position.
 - Valves type I, W, L, V and O reposition.
 - The type K valve remains switched





MONOSTABLE OVERRIDE PORT 4
servo-assisted

- Press and hold the manual control in position (not necessary for bistable type K valve)
- Release the manual control:
 - The manual control returns to the home position.
 - Valves type I, W, L, V and O reposition.
 - The type K valve remains switched

N.B.: The pilot power supply X must be present.

- The reference code for the monostable control ends in "0".





BISTABLE OVERRIDE PORT 2
servo-assisted

- Press the manual control right in then turn it clockwise 90 degrees and Leave it in position.
- Rotate the manual control 90 degrees anticlockwise, and then release it.
 - The manual control returns to the home position.
 - Valves type I, W, L, V and O reposition.
 - The type K valve remains switched

N.B.: The pilot power supply X must be present.

- The reference code for the monostable control ends in "1".




BISTABLE OVERRIDE PORT 4
servo-assisted

- Press the manual control right in then turn it 90 degrees clockwise and Leave it in position.
- Rotate the manual control 90 degrees anticlockwise, and then release it:
 - The manual control returns to the home position.
 - Valves type I, W, L and O reposition.
 - The type K valve remains switched


N.B.: The pilot power supply X must be present.

1 VALVE DIMENSIONS CM Ø 4

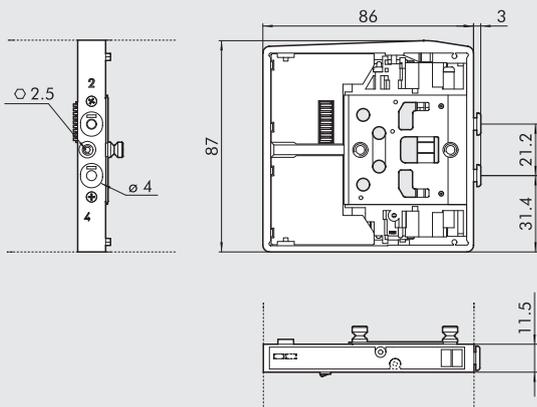

Symbol		Code	Manual control	Weight [g]
CM		7074030530	monostable	130
I4		7074030531	bistable	
CM		7074030630	monostable	130
W4		7074030631	bistable	
CM		7074030730	monostable	130
L4		7074030731	bistable	
CM		7074030130	monostable	115
V4		7074030131	bistable	
CM		7074030110	monostable	130
K4		7074030111	bistable	
CM		7074030210	monostable	130
O4		7074030211	bistable	


16 CONNECTION BRACKETS ON DIN BAR

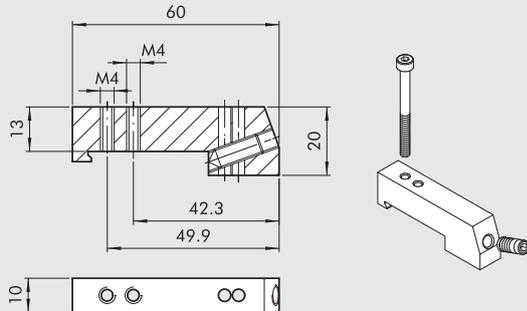

Code	Description	Weight [g]
0227301600	Connection brackets on din bar HDM/CM	30

Supplied complete with one M4x45 screws and one grub screw
Individually packed


SILENCER FOR FITTING, Ø 8

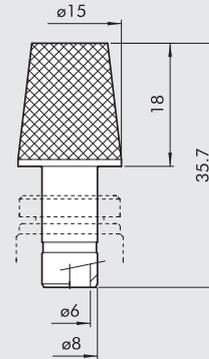

Code	Description	Weight [g]
W0970530084	Silencer for fitting, Ø 8	15

At the 3/5-exhaust port of the intermediate through reference 6
and the exhaust switch reference 20

8 - M8 8-INPUT M8 ADD-ON MODULE (for BUS) – INPUTs / OUTPUTs (for multi-pole connection)

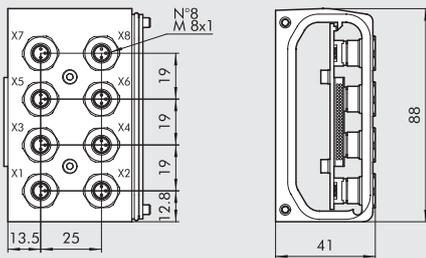

Code	Description	Weight [g]
0227302900	M8 8-input module CM	273

FIELD BUS CONNECTION



MULTI-POLE CONNECTION


<p>INPUT PNP 1 = + 24 VDC 3 = 0VDC 4 = INPUT</p>	<p>INPUT NPN 1 = + 24 VDC 3 = 0VDC 4 = INPUT</p>
<p>OUTPUT PNP 1 = + 24 VDC 3 = 0VDC 4 = INPUT</p>	<p>OUTPUT NPN 1 = + 24 VDC 3 = 0VDC 4 = INPUT</p>
<p>DIP SWITCH</p>	<p>DIP SWITCH</p>
<p>OUTPUT ANALOGIC</p>	<p>INPUT ANALOGIC</p>

M8 PLUG




Code	Description
0240009039	Plug M8

M8 INPUT CONNECTOR

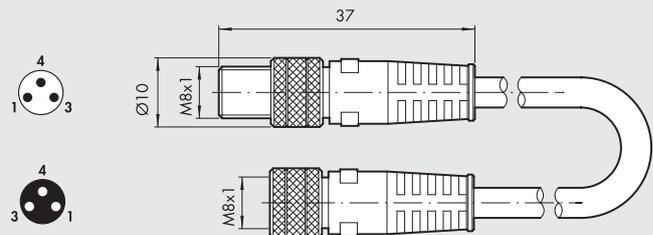


Code	Description
0240009009	M8-M8 straight connector with 3 m cable

23 M8 PREWIRED CONNECTOR FOR VALVE ISLANDS CONNECTIONS

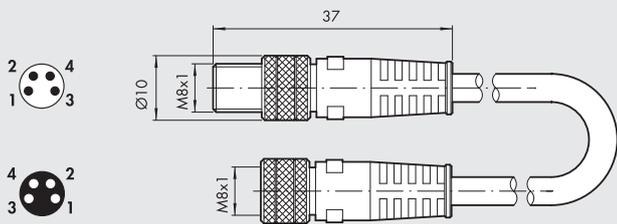

Code	Description
0240005003	M8 prewired connector for valve islands conn. CM L = 5 m
0240005005	M8 prewired connector for valve islands conn. CM L = 1 m
0240005006	M8 prewired connector for valve islands conn. CM L = 3 m
0240005008	M8 prewired connector for valve islands conn. CM L = 10 m


GRUB SCREW KIT



Code	Description
0227301800	Grub screw for Multimach HDM/CM


Comes 1 + 1 packs

DISTRIBUTORS M8 INPUT CONNECTOR

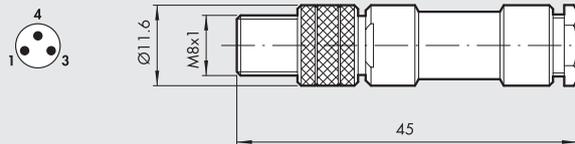

Code	Description
0240009010	M8 3-pin straight connector

R17 - DISASSEMBLY KEY



Length = 140 mm

Code	Description	Ø Tube	Tube
2L17001	RL17	from Ø 3 to Ø 10	For R fitting and Fox fitting

NOTES

Blank area for notes.