
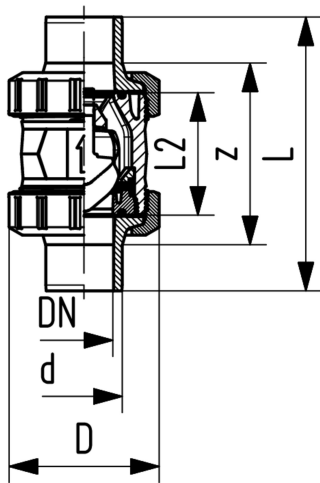


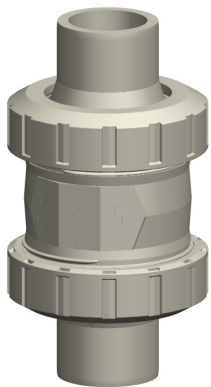

PROGEF Plus silicone free
Check valve type 562
With butt fusion spigots IR-Plus
SDR11 metric

Model:

- Material: PP-H / silicone free cleaned
- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
20	15	10	180	167 562 242	1	0.080	167 562 252	1	0.080
25	20	10	380	167 562 243	1	0.170	167 562 253	1	0.180
32	25	10	460	167 562 244	1	0.190	167 562 254	1	0.190
40	32	10	850	167 562 245	1	0.340	167 562 255	1	0.340
50	40	10	1080	167 562 246	1	0.490	167 562 256	1	0.490
63	50	10	1670	167 562 247	1	0.930	167 562 257	1	0.930
75	65	10	2950	167 562 248	1	2.350	167 562 258	1	2.360
90	80	10	3600	167 562 249	1	3.660	167 562 259	1	3.680
110	100	10	4150	167 562 250	1	5.810	167 562 260	1	5.830

d (mm)	D (mm)	L (mm)	L2 (mm)	e (mm)	closest inch (inch)
20	50	130	56	1.9	1/2
25	58	143	65	2.3	3/4
32	68	150	71	3.0	1
40	84	171	85	3.7	1 1/4
50	97	191	89	4.6	1 1/2
63	124	220	101	5.8	2
75	166	266	136	8.2	2 1/2
90	200	264	141	9.9	3
110	238	301	164	12.0	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>