


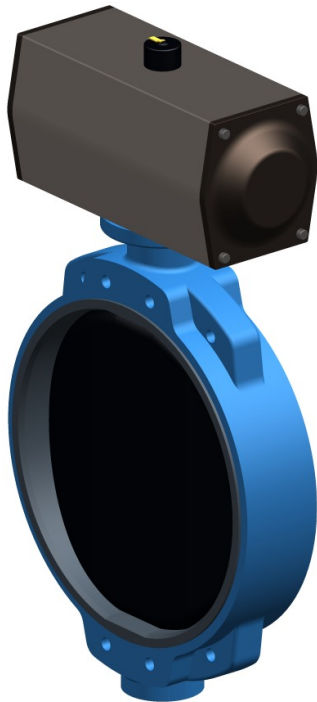

Metal - butterfly valve type 039P DA (Double acting)
Without manual override DN350-1200 metric

Model:

- Housing: Ductile Iron ASTM A 395, Epoxy coated
- Seatliner available in EPDM, FKM on request
- Disc available in Aluminium Bronze on request
- Up to DN 1200: Overall length according to EN 558, line 20, ISO 5752
- Connecting dimension: EN 1092 PN10

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Disc: ductile iron: EPOXY coated EPDM Code	SP	Weight (kg)	Disc: stainless steel EPDM Code	SP	Weight (kg)
355	350	10	143360	198 039 200	1	0.001	198 039 210	1	65.000
400	400	10	186700	198 039 201	1	0.001	198 039 211	1	112.000
450	450	10	258390	198 039 202	1	0.001	198 039 212	1	0.001
500	500	10	316730	198 039 203	1	0.001	198 039 213	1	0.001
630	600	10	431750	198 039 204	1	187.000	198 039 214	1	0.001
700	700	10	618333	198 039 205	1	187.000	198 039 215	1	187.000
800	800	10	675000	198 039 206	1	289.000	198 039 216	1	289.000
900	900	10	1005200	198 039 207	1	980.000	198 039 217	1	980.000
1000	1000	10	1306930	198 039 208	1	980.000	198 039 218	1	980.000
1200	1200	10	1907050	198 039 209	1	980.000	198 039 219	1	980.000

d (mm)	Disc: ductile iron: EPOXY coated FKM Code	SP	Weight (kg)	Disc: stainless steel FKM Code	SP	Weight (kg)
355	198 039 240	1	43.000	198 039 250	1	43.000
400	198 039 241	1	90.000	198 039 251	1	0.001
450	198 039 242	1	112.000	198 039 252	1	112.000
500	198 039 243	1	112.000	198 039 253	1	112.000
630	198 039 244	1	187.000	198 039 254	1	187.000
700	198 039 245	1	187.000	198 039 255	1	187.000
800	198 039 246	1	289.000	198 039 256	1	289.000
900	198 039 247	1	980.000	198 039 257	1	980.000
1000	198 039 248	1	980.000	198 039 258	1	980.000
1200	198 039 249	1	980.000	198 039 259	1	980.000


d (mm)	Actuator unit type	D (mm)	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	L2 (mm)	M (mm)	Q1 (mm)	N (mm)
355	CH-B200	21	460	442	291	307	290	220	575	20	332	16
400	CH-B240	25	515	193	325	342	290	220	575	24	382	16
450	CH-B240	25	565	544	357	387	380	350	684	24	432	20
500	CH-B270	25	620	601	381	425	380	350	684	24	478	20
630	CH-B350	28	725	695	488	532	432	349	860	27	585	20
700	CH-B350	28	840	798	506	573	432	349	860	27	683	24

Data sheet

valid from: 10/23/20



d (mm)	Actuator unit type	D (mm)	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	L2 (mm)	M (mm)	Q1 (mm)	N (mm)
800	CH-B400	31	950	908	578	650	510	450	918	30	755	24
900	CH-B500	31	1050	1004	643	707	700	640	1550	30	852	28
1000	CH-B500	34	1160	1114	729	755	700	640	1550	33	958	28
1200	CH-B500	37	1380	1330	855	900	700	640	1550	36	1098	32

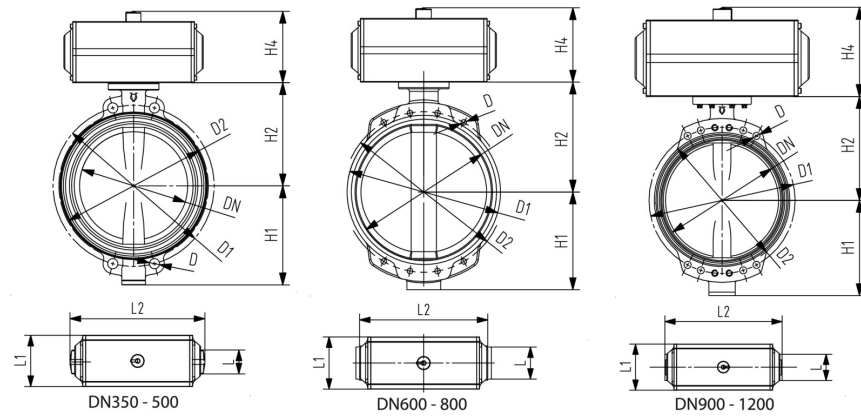

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>