

Metal - butterfly valve type 039P DA (Double acting) Without manual override

Model:

- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Seat material: EPDM, FKM and others on request
- Single-piece axis with square profile, up to DN 600 mm 2-pieces axis
- Installation length: EN 558 row 20
- Mounting between ISO, ANSI, BS or JIS Flanges
- Interface according to DIN EN ISO 5211

d	Size	DN	PN	kv-value	Disc: ductile	SP	Weight	Disc:	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	iron/Rilsan®		(kg)	stainless		(kg)
				(l/min)	coated			steel EPDM		
					EPDM			Code		
					Code					
63	2	50	10	3167	199 039 104	1	5.320	199 039 304	1	5.320
75	2 1/2	65	10	4667	199 039 105	1	6.020	199 039 305	1	6.020
90	3	80	10	7167	199 039 106	1	3.900	199 039 306	1	6.970
110	4	100	10	11833	199 039 107	1	4.640	199 039 307	1	9.300
140	5	125	10	18333	199 039 108	1	6.600	199 039 308	1	12.360
160	6	150	10	26667	199 039 109	1	8.060	199 039 309	1	15.820
225	8	200	10	46667	199 039 110	1	13.610	199 039 310	1	24.870
280	10	250	10	78333	199 039 111	1	21.710	199 039 311	1	34.170
315	12	300	10	115000	199 039 112	1	29.710	199 039 312	1	50.450


d	Disc: Alu- bronze	SP	Weight
(mm)	EPDM		(kg)
	Code		
63	199 039 504	1	5.320
75	199 039 505	1	6.020
90	199 039 506	1	6.970
110	199 039 507	1	9.300
140	199 039 508	1	12.360
160	199 039 509	1	15.820
225	199 039 510	1	24.870
280	199 039 511	1	34.170
315	199 039 512	1	50.450

d	Actuator unit	D3	D4	H	H1	H2	H3	H4	H5	H6	L	L1	L3
(mm)	type	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	PA-35	95	165	308	55	140	113	35	60	15	43	190	60
75	PA-35	114	185	330	65	152	113	35	60	15	46	190	60
90	PA-35	131	190	345	73	159	113	38	71	15	46	190	60
110	PA-45	152	229	392	87	178	127	38	71	15	52	235	72
140	PA-45	182	254	420	102	191	127	46	86	15	56	235	72
160	PA-55	209	285	476	118	203	155	46	86	15	56	279	90
225	PA-60	262	343	559	149	245	165	56	106	15	60	341	100
280	PA-65	331	333	662	200	275	187	56	106	25	68	350	112
315	PA-70	380	353	741	227	315	199	68	130	25	78	381	124

d	Cv val- ue ($\Delta p=1$ psi)
(mm)	(l/min)
63	220
75	320
90	500
110	820
140	1300

Data sheet

valid from: 10/21/20

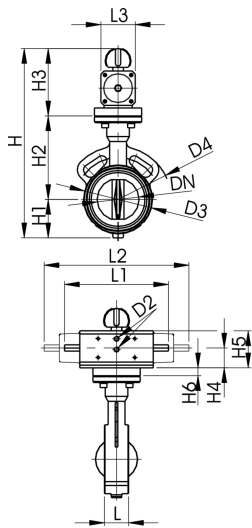

d (mm)	Cv value ($\Delta p=1$ psi) (l/min)
160	1900
225	3330
280	5400
315	8000

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>