




Butterfly valve type 567 PVC-U Reduction gear with handwheel

Model:

- Up to DN 300: Overall length according to EN558 (DN 50-200: line 25, DN250, 300 line 16), ISO 5752
- Connecting dimension: ISO 7005 PN 10, EN 1092 PN 10, DIN 2501 PN 10, ANSI/ASME B 16.5 Class 150, BS 1560: 1989, BS 4504, JIS B 2220

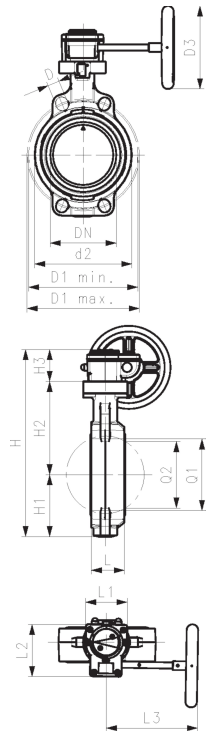

d	Size	DN	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(l/min)						
63	2	50	10	1470	161 567 042	1	3.078	161 567 062	1	3.082
75	2 1/2	65	10	2200	161 567 043	1	3.181	161 567 063	1	3.186
90	3	80	10	3000	161 567 044	1	3.346	161 567 064	1	3.353
110	4	100	10	6500	161 567 045	1	4.022	161 567 065	1	3.973
140	5	125	10	11500	161 567 046	1	4.185	161 567 066	1	4.544
160	6	150	10	16600	161 567 047	1	5.174	161 567 067	1	5.181
225	8	200	10	39600	161 567 048	1	7.072	161 567 068	1	8.339
280	10	250	10	51000	161 567 049	1	14.741	161 567 069	1	15.115
315	12	300	10	73000	161 567 050	1	19.254	161 567 070	1	35.000
355	14	350	6	90000	161 567 051	1	50.000	161 567 071	1	55.000
400	16	400	6	115000	161 567 052	1	60.000	161 567 072	1	60.000

d	d2	D	D1 min.	D1 max.	D3	H	H1	H2	H3	L	L1	L2	L3	Q1
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	104	19	120	125	160	273	77	134	62	45	78	112	179	40
75	115	19	140	145	160	285	83	140	62	46	78	112	179	54
90	131	19	150	160	160	297	89	146	62	49	78	112	179	67
110	160	19	175	191	160	333	104	167	62	56	78	112	179	88
140	187	23	210	216	160	360	117	181	62	64	78	112	179	113
160	215	24	241	241	160	381	130	189	62	72	78	112	179	139
225	267	23	290	295	160	430	158	210	62	73	78	112	179	178
280	329	25	353	362	200	538	205	264	69	113	97	130	198	210
315	379	25	400	432	200	582	228	285	69	113	97	130	198	256
355	535	29	445	477	200	747	268	410	69	129	180	168	218	325
400	595	29	510	540	200	804	300	435	69	169	180	195	218	353

d	Q2
(mm)	(mm)
63	
75	35
90	50
110	74
140	97
160	123
225	169
280	207
315	253
355	305
400	350

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 7/4/17



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>