


Check valve type 561 PVC-C
With solvent cement sockets metric

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

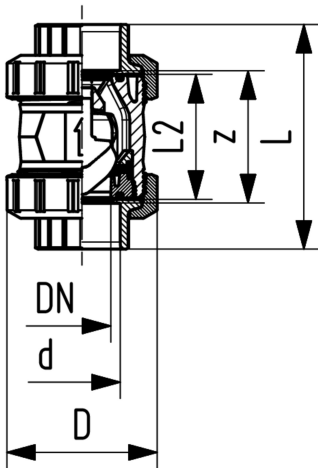

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	10	3/8	16	190	163 561 001	1	0.120	163 561 011	1	0.120
20	15	1/2	16	180	163 561 002	1	0.120	163 561 012	1	0.120
25	20	3/4	16	380	163 561 003	1	0.260	163 561 013	1	0.280
32	25	1	16	460	163 561 004	1	0.280	163 561 014	1	0.280
40	32	1 1/4	16	850	163 561 005	1	0.490	163 561 015	1	0.490
50	40	1 1/2	16	1080	163 561 006	1	0.710	163 561 016	1	0.710
63	50	2	16	1670	163 561 007	1	1.456	163 561 017	1	1.470
75	65	2 1/2	16	2950	163 561 008	1	3.460	163 561 018	1	3.480
90	80	3	16	3600	163 561 009	1	5.540	163 561 019	1	5.570
110	100	4	16	4150	163 561 010	1	8.930	163 561 020	1	8.970

d (mm)	D (mm)	L (mm)	L2 (mm)	z (mm)	closest inch (inch)
16	50	92	56	64	3/8
20	50	95	56	64	1/2
25	58	110	65	72	3/4
32	68	123	71	79	1
40	84	146	85	94	1 1/4
50	97	157	89	95	1 1/2
63	124	183	101	107	2
75	166	233	136	144	2 1/2
90	200	254	141	151	3
110	238	301	164	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>