


COOL-FIT 4.0 Flex hose



Model:

- EPDM flexible hose with stainless steel protection
- Adaptors stainless steel 1.4404 / 316L
- Pre-Insulation made from EPDM foam with outer jacket impact resistant and tearproof
- With loose union nut G on one end and male thread GA on the other

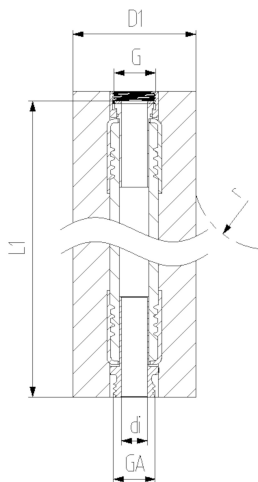

d	D1	Gewindetyp	Size	DN	PN	Code	L1	di	r
(mm)	(mm)		(inch)	(mm)	(bar)		(mm)	(mm)	(mm)
20	72	G/GA	½	15	10	738 923 206	1000	15	119
25	82	G/GA	¾	20	10	738 923 207	1000	19	156
32	92	G/GA	1	25	10	738 923 208	1000	25	192
40	95	G/GA	1 ¼	32	8	738 923 209	1500	32	252
50	110	G/GA	1 ½	40	6	738 923 210	2000	38	312
63	123	G/GA	2	50	6	738 923 211	2000	52	372

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>