





Pressure reducing valve type 582 PVC-C
With solvent cement spigots metric
With manometer

Model:

- Diaphragm PTFE/EPDM
 - Integrated stainless steel mounting inserts
 - 0.5-9.0 bar (7-130 psi)
 - Attention: Manometer with brass connection in direct contact with medium. Check for chemical resistance, otherwise chose the optional manometer adapter for media separation.
- 0.3-3.0 bar (4-44 psi) on request

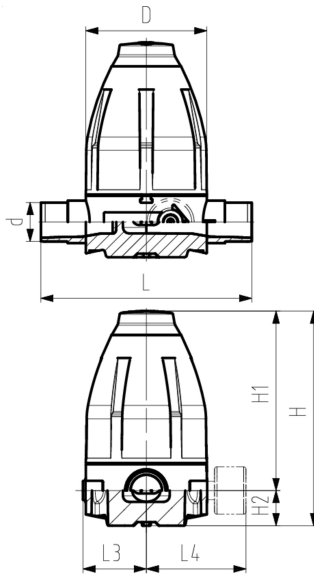

d (mm)	DN (mm)	PN (bar)	O-rings EPDM Code	O-rings FKM Code	Weight (kg)	SP	GP
16	10	10	163 582 021	163 582 031	0.680	1	0
20	15	10	163 582 022	163 582 032	0.680	1	0
25	20	10	163 582 023	163 582 033	1.480	1	0
32	25	10	163 582 024	163 582 034	1.490	1	0
40	32	10	163 582 025	163 582 035	4.100	1	0
50	40	10	163 582 026	163 582 036	4.110	1	0
63	50	10	163 582 027	163 582 037	4.190	1	0

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L3 (mm)	L4 (mm)	L5 (mm)	M	closest inch (inch)
16	79	132	111	21	12	134	42	77	40	M6	3/8
20	79	132	111	21	12	134	42	77	40	M6	1/2
25	100	177	148	29	14	174	53	88	46	M6	3/4
32	100	177	148	29	14	174	53	88	46	M6	1
40	147	251	207	44	21	224	76	111	65	M8	1 1/4
50	147	251	207	44	21	224	76	111	65	M8	1 1/2
63	147	251	207	44	21	244	76	111	65	M8	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>