


Data sheet

valid from: 10/22/20

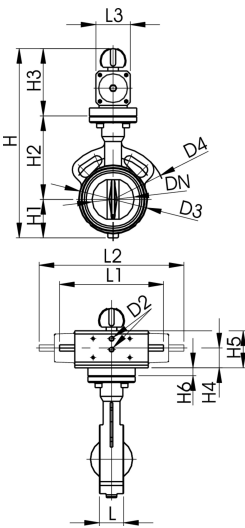

Metal - butterfly valve type 039P FC (Fail safe to close) Without manual override

Model:

- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Seat material: EPDM, FKM and others on request
- Single-piece axis with square profile, up to DN 600 mm 2-pieces axis
- Installation length: EN 558 row 20
- Mounting between ISO, ANSI, BS or JIS Flanges
- Interface according to DIN EN ISO 5211

d	Size	DN	PN	kv-value	Disc: ductile	SP	Weight	Disc:	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	iron/Rilsan®		(kg)	stainless		(kg)
				(l/min)	coated			steel EPDM		
					EPDM			Code		
					Code					
63	2	50	16	3167	199 039 052	1	5.320	199 039 252	1	5.320
75	2 1/2	65	16	4667	199 039 053	1	6.020	199 039 253	1	6.020
90	3	80	16	7167	199 039 054	1	6.110	199 039 254	1	6.110
110	4	100	16	11833	199 039 055	1	7.200	199 039 255	1	7.200
140	5	125	16	18333	199 039 056	1	11.000	199 039 256	1	11.000
160	6	150	16	26667	199 039 057	1	12.610	199 039 257	1	12.610
225	8	200	16	46667	199 039 058	1	21.080	199 039 258	1	21.080
280	10	250	16	78333	199 039 059	1	28.710	199 039 259	1	28.710
315	12	300	16	115000	199 039 060	1	39.230	199 039 260	1	39.230

d	Disc: Alu- bronze	SP	Weight
(mm)	EPDM		(kg)
	Code		
63	199 039 452	1	5.320
75	199 039 453	1	6.020
90	199 039 454	1	6.970
110	199 039 455	1	9.300
140	199 039 456	1	12.360
160	199 039 457	1	15.820
225	199 039 458	1	24.870
280	199 039 459	1	34.170
315	199 039 460	1	50.450

d	Actuator unit	H	H1	H2	H3	H4	L1	L2	Cv val- ue ($\Delta p=1$ psi)	d3	d4
(mm)	type	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(l/min)	(mm)	(mm)
63	PA-30	338	55	140	40	103	65	240	837	95	165
75	PA-30	360	65	152	40	103	65	240	1233	114	185
90	PA-35	391	73	159	46	113	72	294	1893	131	190
110	PA-40	441	87	178	46	130	80	320	3126	152	229
140	PA-45	489	102	191	56	140	90	357	4843	182	254
160	PA-50	527	118	203	56	150	100	395	7045	209	285
225	PA-60	632	149	241	68	174	124	487	12328	262	343
280	PA-60	717	200	275	68	174	124	487	20693	331	333
315	PA-70	823	227	315	83	198	145	551	30380	380	353

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 10/22/20



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>