
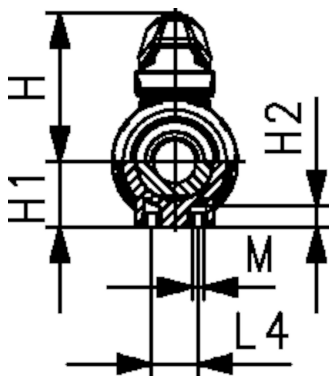





PROGEF Standard Ball valve type 546 Pro With butt fusion spigots long SDR11 metric

Model:

- Material: PP-H
- Lockable lever as standard (DN10-DN50)
- For easy installation and removal
- Ball seals PTFE
- Integrated stainless steel mounting inserts
- Z-dimension, valve end and union nut **are compatible** with type 546 (1st Generation)

Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	SDR	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
20	15	10	185	11	167 546 262	1	0.130	167 546 272	1	0.130
25	20	10	350		167 546 263	1	0.195	167 546 273	1	0.195
32	25	10	700	11	167 546 264	1	0.280	167 546 274	1	0.280
40	32	10	1000	11	167 546 265	1	0.492	167 546 275	1	0.480
50	40	10	1600	11	167 546 266	1	0.691	167 546 276	1	0.700
63	50	10	3100	11	167 546 267	1	1.274	167 546 277	1	1.288

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	L2 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	M	z (mm)
20	50	61	27	12	194	82	56	25	35	47	M6	198
25	58	74	30	12	217	105	65	25	44	62	M6	221
32	68	80	36	12	224	105	71	25	44	62	M6	228
40	84	95	44	15	250	131	85	45	57	74	M8	254
50	97	102	51	15	272	131	89	45	57	74	M8	276
63	124	117	64	15	321	152	101	45	66	87	M8	325

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>