




Metal - butterfly valve type 039E 100-230V 50-60Hz Without manual override

Model:


- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Seat material: EPDM, FKM and others on request
- Voltage 100-230V, 50-60Hz for EA actuator
- Single-piece axis with square profile, up to DN 600 mm 2-pieces axis
- Installation length: EN 558 row 20
- Mounting between ISO, ANSI, BS or JIS Flanges
- Interface according to DIN EN ISO 5211

* Electric actuator for higher nominal pressure on request

d	Size	DN	PN	kv-value	Disc: ductile	SP	Weight	Disc:	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	iron/Rilsan®		(kg)	stainless		(kg)
				(l/min)	coated			steel EPDM		
					EPDM			Code		
					Code					
63	2	50	10	3140	199 039 130	1	5.500	199 039 330	1	5.500
75	2 ½	65	10	4570	199 039 131	1	6.200	199 039 331	1	6.200
90	3	80	10	7140	199 039 132	1	7.900	199 039 332	1	7.900
110	4	100	10	11710	199 039 133	1	9.300	199 039 333	1	9.300
140	5	125	10	18570	199 039 134	1	11.000	199 039 334	1	11.000
160	6	150	10	27130	199 039 135	1	13.900	199 039 335	1	13.900
225	8	200	10	47130	199 039 136	1	18.500	199 039 336	1	18.500
280	10	250	6	77110	199 039 137	1	27.800	199 039 337	1	27.800
315	12	300	4	114240	199 039 138	1	36.700	199 039 338	1	36.700

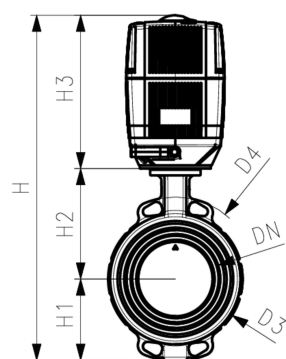

d	Disc: Alu- bronze	SP	Weight
(mm)	EPDM		(kg)
	Code		
63	199 039 530	1	4.900
75	199 039 531	1	4.900
90	199 039 532	1	4.900
110	199 039 533	1	4.900
140	199 039 534	1	4.900
160	199 039 535	1	4.900
225	199 039 536	1	4.900
280	199 039 537	1	4.900
315	199 039 538	1	4.900



d	Actuator unit	D3	D4	H	H1	H2	H3	L	L1	L2	Cv val- ue ($\Delta p=1$ psi)
(mm)	type	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(l/min)
63	EA-31	96	165	383	53	140	188	43	28	122	220
75	EA-31	114	185	405	63	152	188	46	28	122	320
90	EA-31	131	190	420	71	159	188	46	28	122	500
110	EA-31	152	229	415	87	178	188	52	64	181	820
140	EA-31	182	254	443	102	191	188	56	60	220	1300
160	EA-42	209	285	475	122	203	208	56	60	220	1900
225	EA-42	262	343	540	149	241	208	60	60	220	3330
280	EA-42	323	333	671	201	273	208	68	70	220	5400
315	EA-42	373	353	739	231	311	208	78	70	220	8000

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 10/22/20



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>