


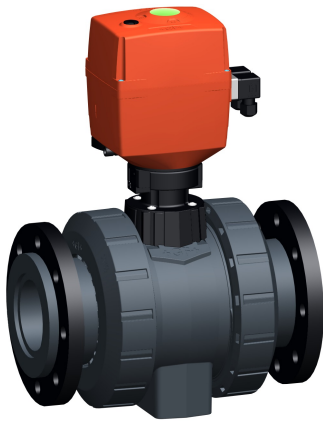

Ball valve type 179 PVC-U 100-230V
With manual emergency override
With backing flanges PP-st metric

Model:

- Voltage 100-230V, 50-60Hz
- Factory set control range 90°<
- Heating element, position feedback (Open/Close/ Middle)
- Integrated stainless steel mounting inserts
- Overall length according to EN 558
- Connecting dimension: ISO 7005, EN 1092, BS 4504, DIN 2501


Option:

- Other valve and actuator configurations available

d	DN	PN	kv-value	EA	EPDM	Weight	FKM	Weight
(mm)	(mm)	(bar)	($\Delta p=1$ bar)		Code	(kg)	Code	(kg)
			(l/min)					
75	65	10	5000	EA45	199 179 349	10.749	199 179 359	11.500
90	80	10	7000	EA120	199 179 350	14.900	199 179 360	14.900
110	100	10	11000	EA120	199 179 351	20.900	199 179 361	20.900

d	D	H	H1	H2	H3	H5	H6	L	L1	L2	L3	L4	L5	L6	L7
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
75	166	346	85	156	94	190	93	284	180	136	290	70	98	83	122
90	200	358	105	168	94	190	100	300	180	141	310	70	98	83	122
110	238	365	123	175	94	190	110	340	180	164	350	120	98	83	122

d	L8
(mm)	(mm)
75	66
90	66
110	66

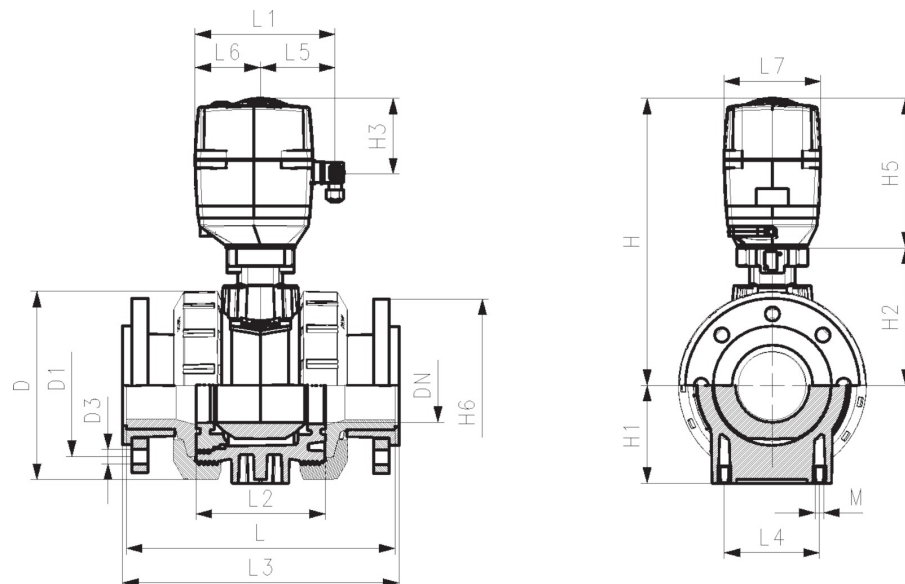

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 6/30/17



Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>