
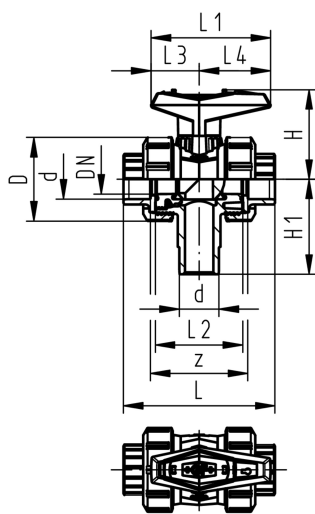






3-Way ball valve type 543 PVC-U Vertical/L-port With solvent cement sockets metric

Model:

- Vertical inlet solvent cement spigot metric
- Easy installation and removal using union on third outlet
- Ball seals PTFE
- Electric actuator available separately
- Angle of operation 360° without turn limiter
- Delivery status B-C opened, see flow scheme

Mode of action:

- For interconnection of two inputs

Individual configuration available on special request

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	FKM Code	SP	Weight (kg)
16	10	10	49	161 543 401	1	161 543 411	1	0.162
20	15	10	77	161 543 402	1	161 543 412	1	0.166
25	20	10	146	161 543 403	1	161 543 413	1	0.255
32	25	10	260	161 543 404	1	161 543 414	1	0.372
40	32	10	437	161 543 405	1	161 543 415	1	0.622
50	40	10	667	161 543 406	1	161 543 416	1	0.886
63	50	10	1293	161 543 407	1	161 543 417	1	1.617

d (mm)	D (mm)	H (mm)	H1 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	z (mm)	closest inch (inch)
16	50	57	62	92	77	56	32	45	64	$\frac{3}{8}$
20	50	57	62	95	77	56	32	45	64	$\frac{1}{2}$
25	58	67	72	111	97	66	39	58	74	$\frac{3}{4}$
32	68	73	77	123	97	71	39	58	79	1
40	84	90	87	146	128	85	54	74	95	1 $\frac{1}{4}$
50	97	97	97	157	128	89	54	74	95	1 $\frac{1}{2}$
63	124	116	112	183	152	101	66	87	107	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>