


Data sheet

valid from: 7/4/17




PROGEF Standard Pressure retaining valve type 586 Unions with fusion sockets metric Without manometer

Model:

- Diaphragm PTFE/EPDM
- Integrated stainless steel mounting inserts
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) on request

Manometer on request

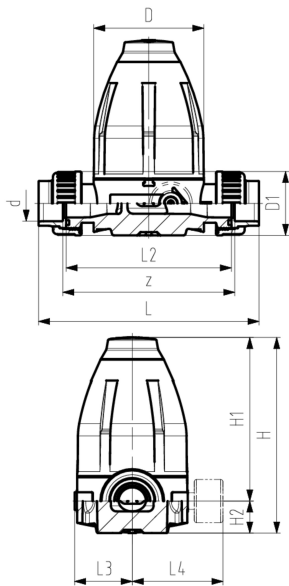

d (mm)	DN (mm)	PN (bar)	O-rings EPDM Code	O-rings FKM Code	Weight (kg)	SP	GP
20	15	10	167 586 102	167 586 112	0.590	1	0
25	20	10	167 586 103	167 586 113	1.310	1	0
32	25	10	167 586 104	167 586 114	1.330	1	0
40	32	10	167 586 105	167 586 115	3.610	1	0
50	40	10	167 586 106	167 586 116	3.660	1	0
63	50	10	167 586 107	167 586 117	3.810	1	0

d (mm)	D (mm)	D1 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L2 (mm)	L3 (mm)	L5 (mm)	M	z (mm)	closest inch (inch)
20	79	48	132	111	21	12	158	120	42	40	M6	126	1/2
25	100	58	177	148	29	14	192	150	53	46	M6	156	3/4
32	100	65	177	148	29	14	196	150	53	46	M6	156	1
40	147	77	251	207	44	21	255	205	76	65	M8	211	1 1/4
50	147	84	251	207	44	21	261	205	76	65	M8	211	1 1/2
63	147	111	251	207	44	21	269	205	76	65	M8	211	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>