




SYGEF Standard Check valve type 561
Without spring
With socket fusion spigots metric

Model:

- Material: PVDF
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

Warning: please make sure the diameter is not reduced through welding beads (Danger of turbulences)

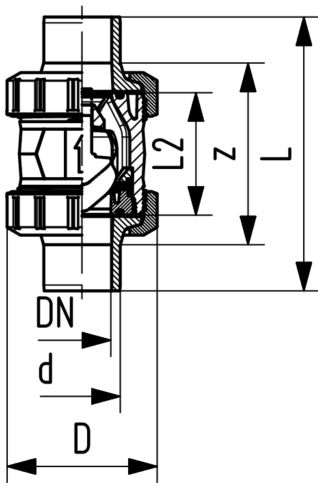

d	DN	Size	PN	kv-value	FKM	SP	Weight	D	L	L2	closest
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	inch
				(l/min)							(inch)
16	10	3/8	16	190	175 561 051	1	0.160	50	110	56	3/8
20	15	1/2	16	180	175 561 052	1	0.170	50	120	56	1/2
25	20	3/4	16	380	175 561 053	1	0.370	58	139	65	3/4
32	25	1	16	460	175 561 054	1	0.400	68	150	71	1
40	32	1 1/4	16	850	175 561 055	1	0.670	84	170	85	1 1/4
50	40	1 1/2	16	1080	175 561 056	1	1.030	97	190	89	1 1/2
63	50	2	16	1670	175 561 057	1	1.830	124	220	101	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>