


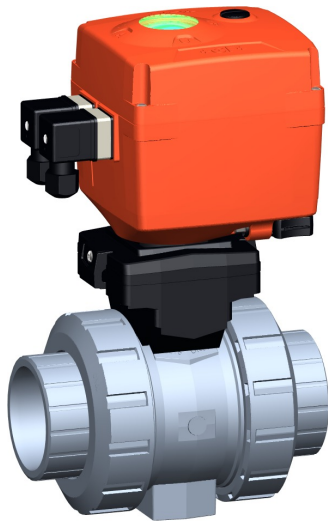

Ball valve type 127 ABS 24V
With manual emergency override
With threaded sockets Rp

Model:


- Built on with electric actuator EA15
- Voltage 24V AC/DC
- Factory set control range 90°<
- Heating element, position feedback (Open/Close)
- Integrated stainless steel mounting inserts

Option:

- Other valve and actuator configurations available
- Optional accessories: Fail-safe return unit

Rp	DN	PN	kv-value	EPDM	Weight
(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code	(kg)
			(l/min)		
3/8	10	10	70	199 127 692	2.100
1/2	15	10	185	199 127 693	2.100
3/4	20	10	350	199 127 694	2.200
1	25	10	700	199 127 695	2.300
1 1/4	32	10	1000	199 127 696	2.600
1 1/2	40	10	1600	199 127 697	3.000
2	50	10	3100	199 127 698	3.800

Rp	D	H	H1	H2	H3	H5	L	L1	L2	L4	L5	L6	L7	L8	z
(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
3/8	50	200	27	64	64	137	92	161	56	25	77	83	122	33	64
1/2	50	200	27	64	64	137	95	161	56	25	77	83	122	33	64
3/4	58	209	30	73	64	137	110	161	65	25	77	83	122	33	72
1	68	209	36	73	64	137	123	161	71	25	77	83	122	33	79
1 1/4	84	220	44	84	64	137	146	161	85	45	77	83	122	33	94
1 1/2	97	220	51	84	64	137	157	161	89	45	77	83	122	33	95
2	124	243	64	106	64	137	183	161	101	45	77	83	122	33	107

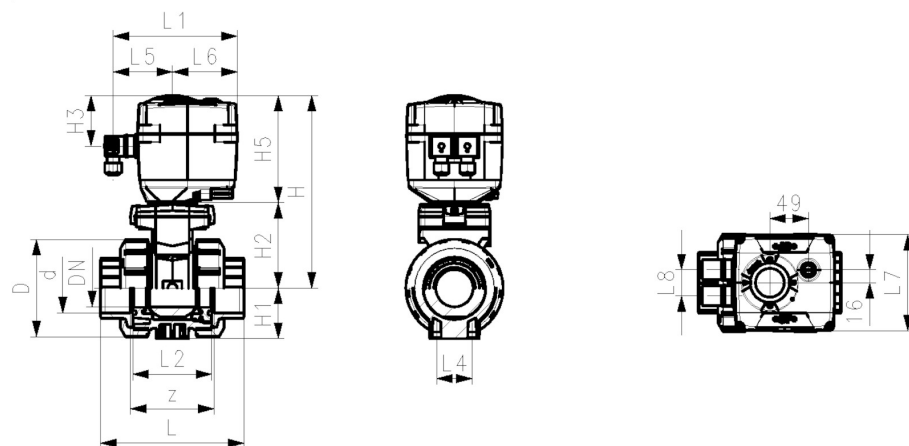

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland
 Phone +41 -(0)52-631 1111

Data sheet

valid from: 8/25/21



e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>