


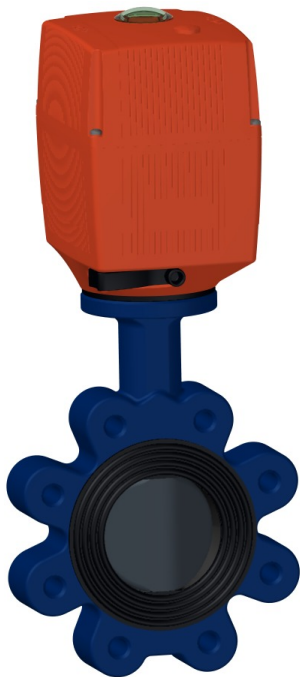


Metal - butterfly valve type 038E 100-230V 50-60Hz Without manual override


Model:

- Seatliner available in EPDM, FKM on request
- Voltage 100-230V, 50-60Hz for EA actuator
- Voltage 115/230V, 50-60Hz for EA actuator
- Housing: ductile iron GGG-40/ASTM A536, Rilsan® coated, from DN 350 Epoxy® coated
- Available in 24V AC/DC and/or in ANSI standard upon request
- In case this valve is used at the end of the line, the following pressures must not be exceeded:
DN50 to DN150 5,6bar and > DN200 3,5bar
- * Electric actuator for higher nominal pressure on request

d	Size	DN	PN	kv-value	Disc: ductile	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	iron/Rilsan®		(kg)
				(l/min)	coated		
					EPDM		
					Code		
63	2	50	10	3140	199 038 130	1	5.400
75	2 ½	65	10	4570	199 038 131	1	6.500
90	3	80	10	7140	199 038 132	1	9.600
110	4	100	10	11710	199 038 133	1	11.600
140	5	125	10	18570	199 038 134	1	18.980
160	6	150	10	27130	199 038 135	1	16.500
225	8	200	10	47130	199 038 136	1	23.300
*	280	10	250	77110	199 038 137	1	36.500
*	315	12	300	114240	199 038 138	1	53.300

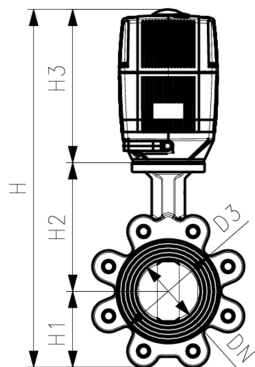

d	Disc: stainless	SP	Weight
(mm)	steel EPDM		(kg)
	Code		
63	199 038 330	1	5.400
75	199 038 331	1	6.500
90	199 038 332	1	9.600
110	199 038 333	1	11.600
140	199 038 334	1	18.980
160	199 038 335	1	16.500
225	199 038 336	1	23.300
*	280	1	36.500
*	315	1	53.300

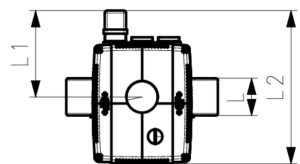

d	Actuator unit	H	H1	H2	H3	L	L1	L2	Cv val-	d3
(mm)	type	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	ue ($\Delta p=1$	(mm)
									psi)	
									(l/min)	
63	EA-31	393	63	140	188	43	28	122	220	65
75	EA-31	415	73	152	188	46	28	122	320	114
90	EA-31	430	81	159	188	46	28	122	500	131
110	EA-31	333	97	178	188	52	60	220	820	152
140	EA-31	361	112	191	188	56	60	220	1300	182
160	EA-42	383	122	203	208	56	60	220	1900	209
225	EA-42	452	149	245	208	60	60	220	3330	262
*	280	545	203	275	208	68	70	220	5400	331
*	315	623	241	315	208	78	70	220	8000	380

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 10/23/20



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>