




Lug-style, end installation butterfly valve type 244 PVC-U
With pneumatic actuator - fail safe to open (FO)
Without manual override
Flange standard ANSI/ASME

Model:

- Housing material: PP-GF30 with SS316 lug-inserts
- Control range 90°<
- Overall length according to EN 558, ISO 5752 (DN50 - 200 line 25, DN250 - 300 line 10)
- Connecting dimension ANSI/ASME B 16.5 Class 150

Option:

- Optional accessory: Valve-Integrated position feedback with limit switches (limit switches have to be ordered separately)

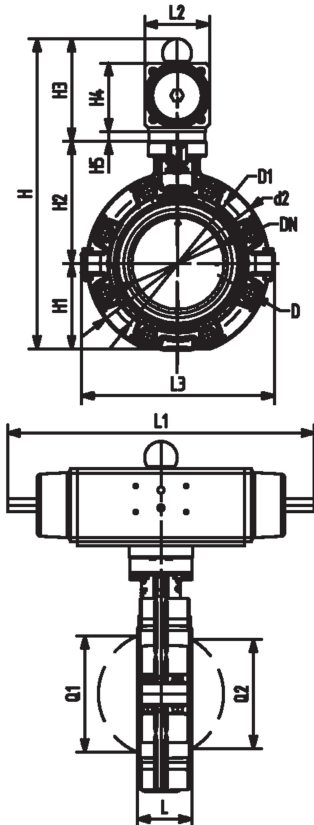

d	Size	DN	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(inch)	(mm)	(bar)	(Δp=1 bar)	Code		(kg)	Code		(kg)
				(l/min)						
63	2	50	10	740	199 244 042	1	3.499	199 244 062	1	3.499
75	2 1/2	65	10	1500	199 244 043	1	3.656	199 244 063	1	3.656
90	3	80	10	2400	199 244 044	1	4.692	199 244 064	1	4.692
110	4	100	10	3800	199 244 045	1	6.406	199 244 065	1	6.406
140	5	125	10	8600	199 244 046	1	9.222	199 244 066	1	9.222
160	6	150	10	11400	199 244 047	1	12.902	199 244 067	1	12.902
225	8	200	10	19900	199 244 048	1	16.691	199 244 068	1	16.691
280	10	250	10	34000	199 244 049	1	33.880	199 244 069	1	33.880
315	12	300	10	50000	199 244 050	1	43.985	199 244 070	1	43.985

Actuator unit type	d2	D	D1	H	H1	H2	H3	H4	H5	L	L1	L2	L3
	(mm)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
PA-30 FO	160	UNC 5/8	120.6	328	77	134	117	70	15	45	276	65	165
PA-30 FO	180	UNC 5/8	139.7	340	83	140	117	70	15	46	276	65	182
PA-35 FO	195	UNC 5/8	152.4	361	89	146	126	78	15	49	326	72	210
PA-40 FO	226	UNC 5/8	190.5	402	106	167	129	86		56	370	80	240
PA-45 FO	258	UNC 3/4	215.9	441	121	181	139	96		64	411	90	272
PA-50 FO	284	UNC 3/4	241.3	471	133	189	149	106		72	423	100	300
PA-55 FO	341	UNC 3/4	298.4	530	159	210	161	118		73	452	112	360
PA-70 FO	482	UNC 7/8	431.8	715	234	285	196	157		113	663	145	510
PA-70 FO	412	UNC 7/8	362.0	660	205	164	191	148		113	648	137	440

Q1	Q2
(mm)	(mm)
40	
54	35
67	50
88	74
113	97
139	123
178	169
256	253
210	207

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

Data sheet

valid from: 4/8/21



e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>