
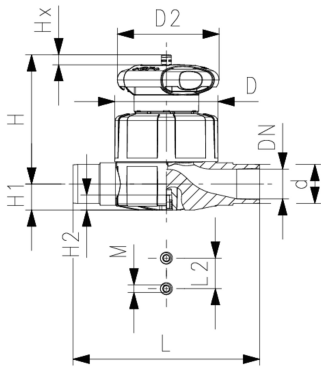




Diaphragm valve type 515 ABS With solvent cement spigots metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

* O-Ring material: FKM

d	DN	Size	PN	kv-value	EPDM	SP	Weight	PTFE/	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	EPDM*		(kg)
				(l/min)				Code		
20	15	½	10	125	169 515 012	1	0.309	169 515 032	1	0.318
25	20	¾	10	271	169 515 013	1	0.401	169 515 033	1	0.412
32	25	1	10	481	169 515 014	1	0.509	169 515 034	1	0.992
40	32	1 ¼	10	759	169 515 015	1	1.143	169 515 035	1	1.164
50	40	1 ½	10	1263	169 515 016	1	2.112	169 515 036	1	2.141
63	50	2	10	1728	169 515 017	1	1.805	169 515 037	1	2.726

d	D	D2	H	H1	H2	L	L2	M	Lift =	closest
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		Hx	inch
									(mm)	(inch)
20	65	65	73	14	12	124	25	M6	7	½
25	80	65	81	18	12	144	25	M6	10	¾
32	88	87	107	22	12	154	25	M6	13	1
40	101	87	115	26	15	174	45	M8	15	1 ¼
50	117	135	148	32	15	194	45	M8	19	1 ½
63	144	135	166	39	15	224	45	M8	25	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>