


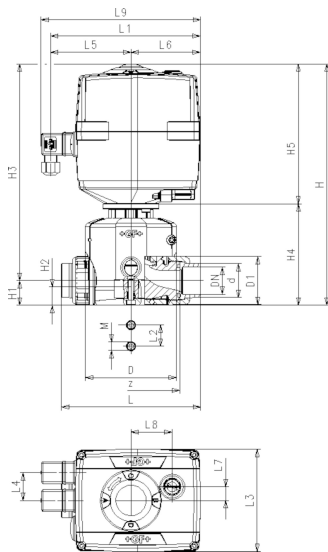

e-DIASTAR Type 514 PVC-U 100-230V With solvent cement sockets JIS

Model:

- Voltage 100-230V, 50-60Hz
- Multiturn Actuator
- Heating element, position feedback (Open/Close)
- Integrated manual emergency override
- Integrated stainless steel mounting inserts

Option:

- Other valve and actuator configurations available
- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

d (mm)	DN (mm)	PN (bar)	EPDM Code	Weight (kg)	PTFE/EPDM Code	Weight (kg)
32	25	10	161 714 814	3.732	161 714 834	3.752
63	50	6	161 714 817	6.609	161 714 837	6.637

kv-value ($\Delta p=1$ bar) (l/min)	D (mm)	D1 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)	L8 (mm)	L9 (mm)	H (mm)
442	108.5	58	170	180	25	122	33	97	82.5	16	49	190	286
1575	168.0	101	265	180	45	122	33	97	82.5	16	49	190	341

H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	z (mm)	M
30.0	20.0	256.0	121	165	122	M6
52.5	28.5	288.5	176	165	190	M8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>