


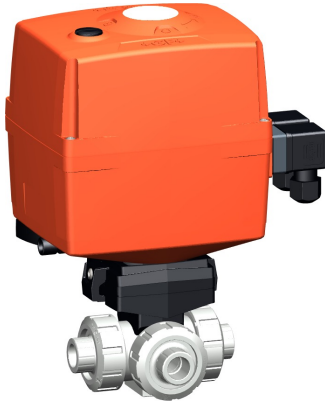


3-Way ball valve type 167 PVC-C
Horizontal/L-port 100-230V
With manual emergency override
With solvent cement sockets metric

Model:

- Voltage 100-230V, 50-60Hz
- Factory set control range 90°<
- Basic position A-C opened, activated position B-C opened, see flow scheme
- Other positions possible by adjusting the limit switches
- Heating element, position feedback (Open/Close/ Middle)
- Integrated stainless steel mounting inserts

Option:

- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board




d	DN	PN	kv-value	EA	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(mm)	(bar)	(Δp=1 bar)		Code		(kg)	Code		(kg)
			(l/min)							
16	10	10	50	EA25	199 167 102	1	2.143	199 167 112	1	2.143
20	15	10	75	EA25	199 167 103	1	2.149	199 167 113	1	2.149
25	20	10	150	EA25	199 167 104	1	2.287	199 167 114	1	2.287
32	25	10	280	EA25	199 167 105	1	2.493	199 167 115	1	2.493
40	32	10	480	EA25	199 167 106	1	2.950	199 167 116	1	2.950
50	40	10	620	EA25	199 167 107	1	3.441	199 167 117	1	3.441
63	50	10	1230	EA25	199 167 108	1	4.916	199 167 118	1	4.916

D	H	H1	H2	H3	H5	H6	L	L1	L2	L3	L4	L5	L6	L7	L8
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
50	231	28	64	94	167	8	109	180	73	36	25	97	83	122	33
50	231	28	64	94	167	8	112	180	73	36	25	97	83	122	33
58	240	32	73	94	167	8	131	180	86	43	25	97	83	122	33
68	240	36	73	94	167	8	151	180	99	50	25	97	83	122	33
84	251	45	84	94	167	9	181	180	120	60	45	97	83	122	33
97	251	51	84	94	167	9	205	180	137	69	45	97	83	122	33
124	273	65	106	94	167	9	261	180	179	89	45	97	83	122	33




M	z	z1	closest
(mm)	(mm)	(mm)	inch
			(inch)
6	81	40	3/8
6	81	40	1/2
6	94	47	3/4

Data sheet

valid from: 7/4/17



M	z	z1	closest inch
(mm)	(mm)	(mm)	(inch)
6	107	54	1
8	130	65	1 1/4
8	143	72	1 1/2
8	185	92	2

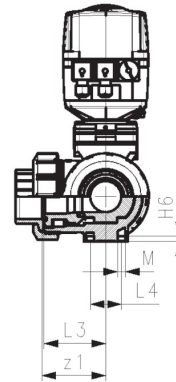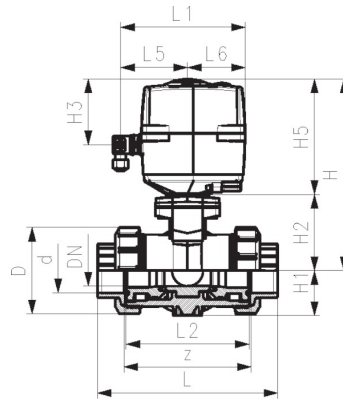

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>