

- > **Port size: G1/8 & G1/4**
- > **Very compact unit**
- > **High efficiency fluids and particle removal**



Technical features

Medium:

Compressed air only

Maximum inlet pressure:

10 bar (145 psi) Transparent bowl

17 bar (246 psi) Metal bowl

Pressure range:

0,3 ... 7 bar (4 ... 101 psi),

0,3 ... 3,5 bar (4 ... 50 psi),

0,1 ... 0,7 bar (1 ... 10 psi),

0,3 ... 10 bar (4 ... 145 psi)

Element:

5 or 40 µm

Flow:

see below

Port sizes:

G1/8 or G1/4

Rc1/8 (Gauge)

Bowl:

31 ml

Drain:

Manual or automatic

Ambient/Media temperature:

Transparent bowl

-34 ... +50°C (-29 ... +122°F)

Metal bowl

-34 ... +65°C (-29 ... +149°F)

Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F)

Materials:

Body: Zinc alloy



Bonnet: Acetal

Bowl: Plastic or zinc alloy

Filter element: Sintered PE

Seals: NBR

Technical data, standard models with relieving

| Symbol | Port size | Pressure range (bar) | Element (µm) | Flow *1) (dm³/s) | Drain | Bowl | Weight (kg) | Model |
|---|-----------|----------------------|--------------|------------------|-----------|---------|-------------|--------------|
|  | G1/8 | 0,3 ... 7 | 40 | 6,2 | Manual | Plastic | 0,26 | B07-101-M3KG |
| | G1/4 | 0,3 ... 7 | 40 | 6,5 | Manual | Plastic | 0,26 | B07-201-M3KG |
|  | G1/8 | 0,3 ... 7 | 40 | 6,2 | Automatic | Plastic | 0,26 | B07-101-A3KG |
| | G1/4 | 0,3 ... 7 | 40 | 6,5 | Automatic | Plastic | 0,26 | B07-201-A3KG |

*1) Flow at inlet pressure 10 bar (145 psi), outlet pressure 6,3 bar (91 psi) and pressure drop 1 bar (14 psi)

Option selector

B07-★★★★★


| Port size | Substitute | Thread | Substitute |
|-----------------------|------------|--------------------------|------------|
| 1/8" | 1 | PTF | A |
| 1/4" | 2 | ISO G | G |
| Bowl/Option | Substitute | Pressure range (bar) *1) | Substitute |
| Plastic/relieving | 01 | 0,1 ... 0,7 | A |
| Plastic/non-relieving | 03 | 0,3 ... 3,5 | E |
| Metal/relieving | 33 | 0,3 ... 7 | K |
| Metal/non-relieving | 35 | 0,3 ... 10 | M *2) |
| Metal/relieving | 05 *2) | Element (µm) | Substitute |
| Metal/non-relieving | 07 *2) | 5 | 1 |
| | | 40 | 3 |
| | | Drain | Substitute |
| | | Automatic | A |
| | | Manual | M |

*1) Outlet pressure can be adjusted to pressures in excess of, and less than, those specified. Do not use these units to control pressures outside of the specified ranges.

*2) When specifying 10 bar (145 psi) unit, eg. B07-205-A3MG, also note correct code at 5th, 6th and 9th digits.

Flow characteristics


Port size 1/4", 40 µm Element, Pressure range 0,3 ... 7 bar

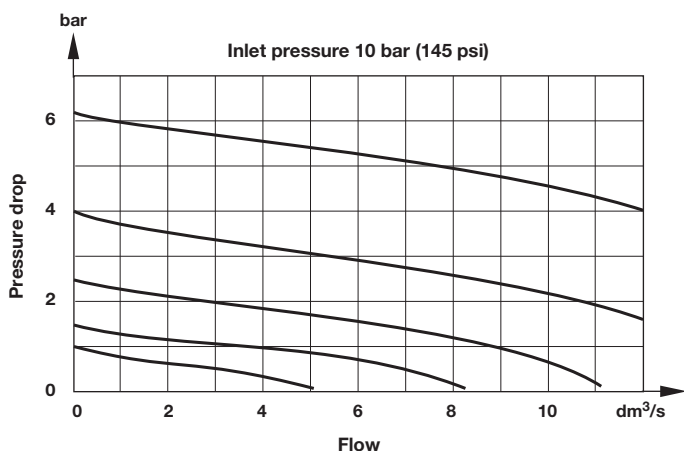





Accessories

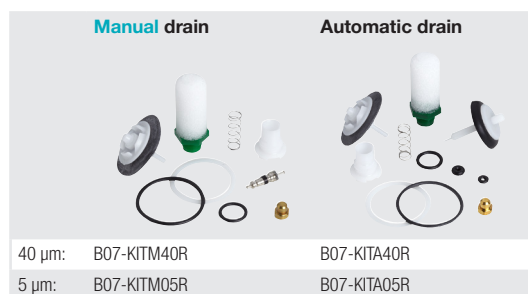


Service kit




| Wall mounting bracket and panel nut | Panel nut | Tamper resistant field modification | Gauge ø 40 mm |
|---|---|---|--|
|  |  |  |  |
| 1 & 4 | 4 | 3 | 6 |
| 18-025-003 (with plastic nut) | 2962-04 (Metal) | 18-001-092 | 18-015-990 (0 ... 4 bar) |
| 18-025-004 (with metal nut) | 2962-89 (Plastic) | | 18-015-989 (0 ... 10 bar) |

Dimensions

Manual drain

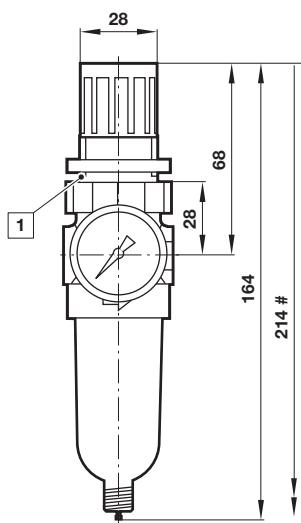


Automatic drain

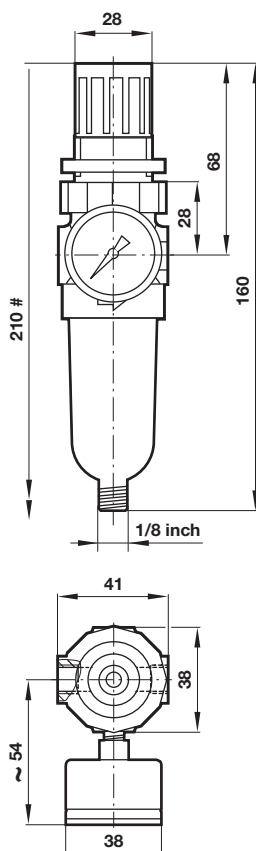

Bracket mounting

Dimensions in mm
 Projection/First angle

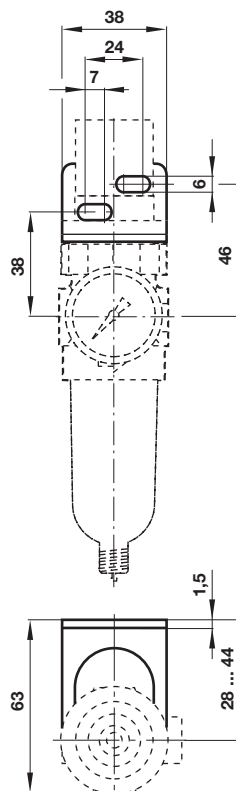

Minimum clearance required to remove bowl

1 Panel mounting hole Ø 31 mm

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

»Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren GmbH.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.