
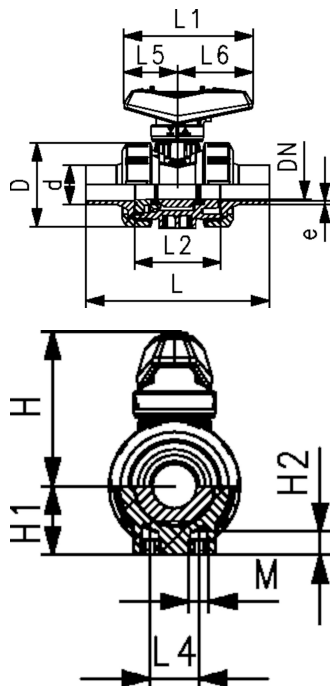




ecoFIT Ball valve type 546 Pro PP-H
With butt fusion spigots PE100 SDR17.6 metric

Model:

- Material: PP-H/PE
- Lockable lever as standard (DN10-DN50)
- For easy installation and removal
- Ball seals PTFE
- Integrated stainless steel mounting inserts
- Z-dimension, valve end and union nut **are compatible** with type 546 (1st Generation)

Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

d	DN	PN	kv-value	SDR	EPDM	Weight	FKM	Weight
(mm)	(mm)	(bar)	($\Delta p=1$ bar)		Code	(kg)	Code	(kg)
50	40	10	1600	17.6	167 546 126	0.620	167 546 136	0.620
63	50	10	3100	17.6	167 546 127	1.200	167 546 137	1.200

d	D	H	H1	H2	L	L1	L2	L4	L5	L6	M	z
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
50	97	102	51	15	190	131	89	45	57	74	M8	186
63	124	117	64	15	219	152	101	70	66	86	M8	215

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>