


3-Way ball valve type 543 ABS Horizontal/T-port/With threaded sockets Rp



Model:

- For easy installation and removal (valve end and union nut are compatible with type 546)
- Ball seals PTFE
- Pneumatic or electric actuator available separately
- Angle of operation 360° without turn limiter
- Turn limiter 90° enclosed, in different positions usable as a clip-on ring
- Integrated stainless steel mounting inserts
- Delivery status A-B-C opened, see flow scheme

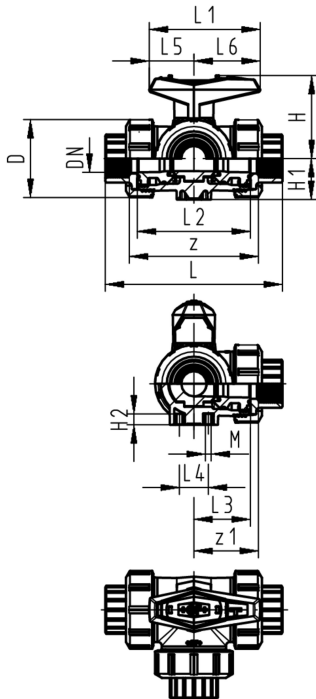

d	Thread Type	Size	DN	PN	kv-value	EPDM	SP	Weight
(mm)		(inch)	(mm)	(bar)	(Δp=1 bar)	Code		(kg)
					(l/min)			
16	Rp	3/8	10	10	140	169 543 241	1	0.186
20	Rp	1/2	15	10	200	169 543 242	1	0.191
25	Rp	3/4	20	10	470	169 543 243	1	0.274
	Rp		25	10	793	169 543 244	1	0.415
40	Rp	1 1/4	32	10	1290	169 543 245	1	0.708
50	Rp	1 1/2	40	10	1910	169 543 246	1	1.045
63	Rp	2	50	10	3100	169 543 247	1	2.030

D	H	H1	H2	L	L1	L2	L3	L4	L5	L6	M	z	z1
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
50	57	28	8	113	77	73	36	25	32	45	6	87	43
50	57	28	8	117	77	73	36	25	32	45	6	85	42
58	67	32	8	135	97	86	43	25	39	58	6	100	50
68	73	36	8	155	97	99	50	25	39	58	6	113	57
84	90	45	9	179	128	120	60	45	54	74	8	134	67
97	97	51	9	201	128	137	69	45	54	74	8	155	78
124	116	65	9	255	152	179	89	45	66	87	8	199	99



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>