



-25°C ÷ 100°C
Below 0°C in the presence of water with antifreeze glycol



Working pressure:
Up to 25 Bar



Compressed air, water, oil and fluids suitable with construction materials



Inlet thread:
Parallel gas BSPP ISO 228 from G1-1/2" to G2"
Outlet thread:
Taper gas BSPT ISO 7 R3/4"
Pressure Gauge thread:
Parallel gas BSPP ISO 228 G1/2"



Body: Stainless steel AISI 304 with treatment of electropolishing




Products in compliance with EC Regulation 1907/2006



Products in compliance with the directive EU 2015/863

4150TRX

Stainless steel AISI 304 distribution manifold

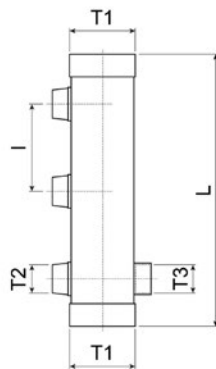

CODE	T1	T2	T3	I	L	N° HOLES
4150TRX112344	G 1-1/2"	R 3/4"	G 1/2"	70,0	291,0	4
4150TRX112345	G 1-1/2"	R 3/4"	G 1/2"	70,0	361,0	5
4150TRX112346	G 1-1/2"	R 3/4"	G 1/2"	70,0	431,0	6
4150TRX112347	G 1-1/2"	R 3/4"	G 1/2"	70,0	501,0	7
4150TRX112348	G 1-1/2"	R 3/4"	G 1/2"	70,0	571,0	8
4150TRX112349	G 1-1/2"	R 3/4"	G 1/2"	70,0	641,0	9
4150TRX1123410	G 1-1/2"	R 3/4"	G 1/2"	70,0	711,0	10
4150TRX1123411	G 1-1/2"	R 3/4"	G 1/2"	70,0	781,0	11
4150TRX1123412	G 1-1/2"	R 3/4"	G 1/2"	70,0	851,0	12
4150TRX1123413	G 1-1/2"	R 3/4"	G 1/2"	70,0	921,0	13
4150TRX1123414	G 1-1/2"	R 3/4"	G 1/2"	70,0	991,0	14
4150TRX2344	G 2"	R 3/4"	G 1/2"	70,0	299,0	4
4150TRX2345	G 2"	R 3/4"	G 1/2"	70,0	369,0	5
4150TRX2346	G 2"	R 3/4"	G 1/2"	70,0	439,0	6
4150TRX2347	G 2"	R 3/4"	G 1/2"	70,0	509,0	7
4150TRX2348	G 2"	R 3/4"	G 1/2"	70,0	579,0	8
4150TRX2349	G 2"	R 3/4"	G 1/2"	70,0	649,0	9
4150TRX23410	G 2"	R 3/4"	G 1/2"	70,0	719,0	10
4150TRX23411	G 2"	R 3/4"	G 1/2"	70,0	789,0	11
4150TRX23412	G 2"	R 3/4"	G 1/2"	70,0	859,0	12
4150TRX23413	G 2"	R 3/4"	G 1/2"	70,0	929,0	13
4150TRX23414	G 2"	R 3/4"	G 1/2"	70,0	999,0	14

T1 & T3: Female thread
T2: Male thread

