


ecoFIT Ball valve type 546 Pro PVC-U
With butt fusion spigots PE100 SDR11 metric

Model:

- Material: PVC-U/PE
- Lockable lever as standard (DN10-DN50)
- For easy installation and removal
- Ball seals PTFE
- Integrated stainless steel mounting inserts
- Z-dimension, valve end and union nut **are compatible** with type 546 (1st Generation)

Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

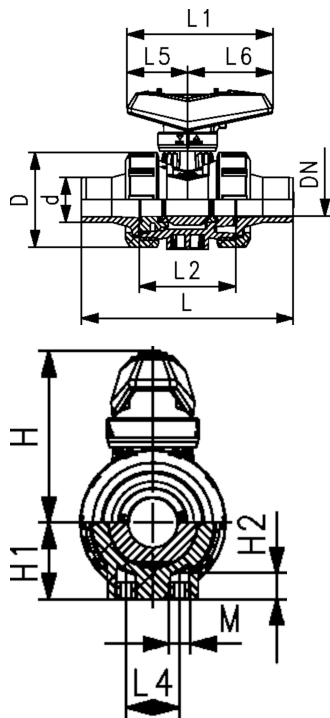

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	SDR	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
20	15	16	185	11	161 546 782	0.151	161 546 792	0.153
25	20	16	350		161 546 783	0.231	161 546 793	0.220
32	25	16	700	11	161 546 784	0.329	161 546 794	0.333
40	32	16	1000	11	161 546 785	0.583	161 546 795	0.586
50	40	16	1600	11	161 546 786	0.817	161 546 796	0.826
63	50	16	3100	11	161 546 787	1.505	161 546 797	1.517

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	L2 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	M	z (mm)
20	50	61	27	12	130	82	56	25	35	47	M6	126
25	58	74	30	12	134	105	65	25	44	62	M6	139
32	68	80	36	15	150	105	71	45	44	62	M8	146
40	84	102	51	15	189	131	89	45	57	74	M8	185
50	97	95	44	15	170	131	85	45	57	74	M8	166
63	124	117	64	15	219	152	101	70	66	86	M8	215

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>