




3-Way ball valve type 543 ABS
Vertical/L-port
With threaded sockets Rp

Model:

- Vertical inlet solvent cement spigot metric
- Easy installation and removal using union on third outlet
- Ball seals PTFE
- Electric actuator available separately
- Angle of operation 360° without turn limiter
- Delivery status B-C opened, see flow scheme

Mode of action:

- For interconnection of two inputs

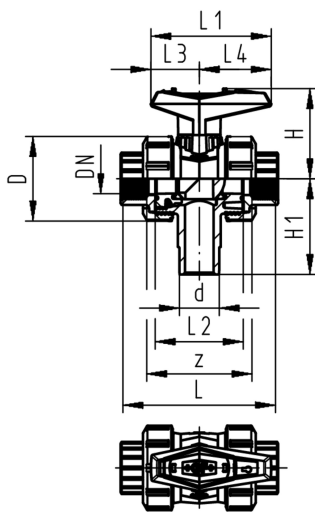

Thread Type	Size (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)
Rp	$\frac{3}{8}$	10	10	49	169 543 421	1	0.124
Rp	$\frac{1}{2}$	15	10	77	169 543 422	1	0.127
Rp	$\frac{3}{4}$	20	10	146	169 543 423	1	0.194
Rp	1	25	10	260	169 543 424	1	0.284
Rp	1 $\frac{1}{4}$	32	10	437	169 543 425	1	0.475
Rp	1 $\frac{1}{2}$	40	10	667	169 543 426	1	0.676
Rp	2	50	10	1293	169 543 427	1	1.234

D	H	H1	L	L1	L2	L3	L4	z
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
50	57	62	96	77	56	32	45	69
50	57	62	99	77	56	32	45	67
58	67	72	115	97	66	39	58	78
68	73	77	127	97	71	39	58	85
84	90	87	144	128	85	54	74	100
97	97	97	153	128	89	54	74	106
124	116	112	177	152	101	66	87	121

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>