




COOL-FIT 4.0 T90° equal d32-d225

Model:

- Pre-insulated PE100 SDR11, metric
- Insulation made from GF HE foam
- Outer jacket impact resistant. Color: black
- A: Electrofusion Fitting with integrated sealing lip, for a water and vapour tight sealing

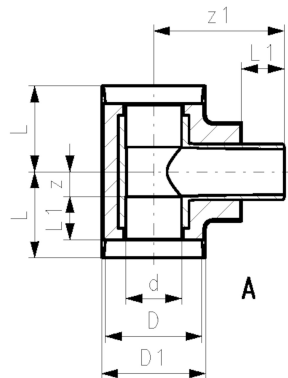

DN (mm)	d/D SDR (mm)	PN (bar)	Code	Weight (kg)
25	32/90	11	16 738 203 108	0.161
32	40/110	11	16 738 203 109	0.257
40	50/110	11	16 738 203 110	0.342
50	63/125	11	16 738 203 111	0.514
65	75/140	11	16 738 203 112	1.000
80	90/160	11	16 738 203 113	1.400
100	110/180	11	16 738 203 114	2.500
150	160/250	11	16 738 203 117	5.600
200	225/315	11	16 738 203 120	16.748

D1 (mm)	L (mm)	L1 (mm)	z (mm)	z1 (mm)	closest inch (inch)	Type
97	79	36	18	118	1	A
117	87	40	22	132	1 ¼	A
117	94	44	25	138	1 ½	A
132	103	48	30	154	2	A
147	116	55	36	168	2 ½	A
1668	130	62	43	187	3	A
188	154	72	57	207	4	A
258	192	90	77	263	6	A
324	355	110	220	337	8	A

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>