



Diaphragm valve type 317 PVC-U With flanges PVC-U metric


Model:

- Flat sealing faces
- Overall length according to EN 558
- Connecting dimension: ISO 7005 PN 10, EN 1092 PN 10, DIN 2501 PN 10, BS 4504 PN 10
- Connecting dimension: ANSI/ASME B 16.5 class 150, ASTM D 4024, BS 1560, BS EN 1759


Option:

- Handwheel lockable DN65 (basic version not lockable)
- * **DN80, DN100 and DN150 fixed flanges metric and inch ANSI B16.5**

d	Size	DN	PN	kv-value
(mm)	(inch)	(mm)	(bar)	(Δp=1 bar) (l/min)
75	2 1/2	65	10	992
* 90	3	80	10	1700
* 110	4	100	6	2700
* 160	6	150	6	6033



DN 15-65

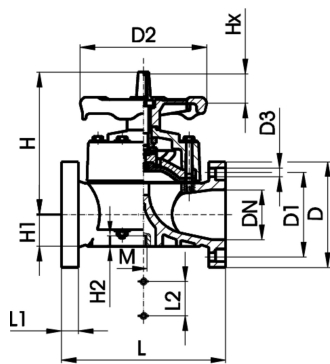

DN 80-100

d	NBR	EPDM	CSM	PTFE with	FKM	SP	Weight
(mm)	Code	Code	Code	EPDM supp. diaphragm Code	Code		(kg)
75	161 317 508	161 317 523	161 317 553	161 317 538	161 317 568	1	5.090
* 90	161 317 009	161 317 024	161 317 054	161 317 039	161 317 069	1	9.700
* 110	161 317 010	161 317 025	161 317 055	161 317 040	161 317 070	1	13.600
* 160	161 317 012	161 317 027	161 317 057	161 317 042	161 317 072	1	27.000

d	D	D1	D2	D3	H	H1	H2	L	L1	L2	L3	M	Lift = Hx	AL
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	
75	185	145	152	18	201	46	15	290		70		M8	30	4
* 90	200	160	270	18	265	57	23	310	35	120		M12	40	8
* 110	225	180	270	18	304	69	23	350	35	120		M12	50	8
* 160	285	240	400	23	437	108	23	480	26	100	200	M12	70	8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>