
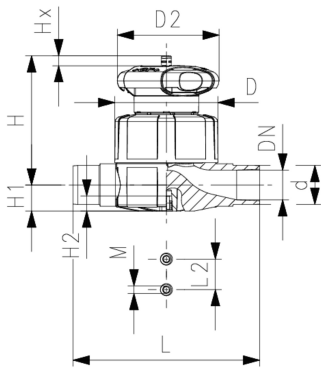




Diaphragm valve type 515 PVC-U With solvent cement spigots metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches
- PN16 available as a configuration

* O-Ring material: FKM

d	Size	DN	PN	kv-value	NBR	SP	Weight	EPDM	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
20	¾	15	10	125	161 515 002	1	0.335	161 515 012	1	0.240
25	¾	20	10	271	161 515 003	1	0.445	161 515 013	1	0.445
32	1	25	10	481	161 515 004	1	0.565	161 515 014	1	0.568
40	1 ¼	32	10	759	161 515 005	1	1.237	161 515 015	1	0.775
50	1 ½	40	10	1263	161 515 006	1	1.363	161 515 016	1	1.364
63	2	50	10	1728	161 515 007	1	2.963	161 515 017	1	2.248

d	PTFE/ EPDM*	SP	Weight	FKM	SP	Weight
(mm)	Code		(kg)	Code		(kg)
20	161 515 032	1	0.238	161 515 062	1	0.243
25	161 515 033	1	0.456	161 515 063	1	0.445
32	161 515 034	1	0.575	161 515 064	1	1.032
40	161 515 035	1	1.257	161 515 065	1	0.785
50	161 515 036	1	2.292	161 515 066	1	2.262
63	161 515 037	1	2.097	161 515 067	1	2.963

d	D	D2	H	H1	H2	L	L2	M	Lift = Hx	closest inch
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(inch)
20	65	65	73	14	12	124	25	M6	7	½
25	80	65	81	18	12	144	25	M6	10	¾
32	88	87	107	22	12	154	25	M6	13	1
40	101	87	115	26	15	174	45	M8	15	1 ¼
50	117	135	148	32	15	194	45	M8	19	1 ½
63	144	135	166	39	15	224	45	M8	25	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>