


Data sheet

valid from: 9/30/21

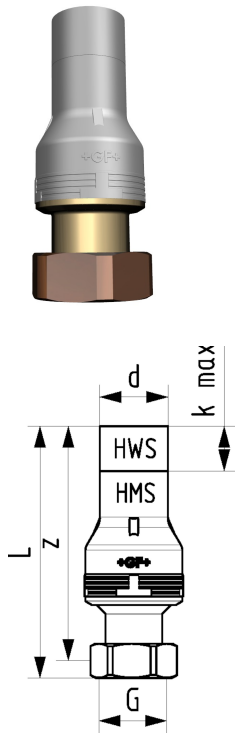

INSTAFLEX Adapter PB/Brass Socket fusion transition to loose nut adapter concerning / Flat seal

Socket fusion transition to loose nut adapter concerning
Thread in DZR brass, UBA (Umwelt Bundesamt, Germany) conform
EPDM sealing hot and cold water approved
Incl. flat seal EPDM

d	G	Code	SP	Weight	L	z	k max.	L min.	SF
(mm)	(inch)			(kg)	(mm)	(mm)	(mm)	(mm)	
16	¾	761 069 684	1	0.715	100	93	22	17	
20	¾	761 069 685	1	0.158	102	94	24	16	
20	1	761 069 686	1	0.171	107	98	24	16	
25	¾	761 069 687	1	0.171	108	101	23	20	
25	1	761 069 688	1	0.211	110	102	23	20	
25	1 ¼	761 069 689	1	0.274	118	109	23	20	
32	1	761 069 690	1	0.260	118	110	21	22	
32	1 ¼	761 069 691	1	0.289	118	110	21	22	
32	1 ½	761 069 692	1	0.358	119	110	21	22	
40	1 ¼	761 069 693	1	0.378	134	105	24	26	
40	1 ½	761 069 694	1	0.402	132	124	24	24	
40	2	761 069 695	1	0.576	139	126	24	24	
50	1 ¾	761 069 696	1	0.607	142	131	22	28	
50	2 ¼	761 069 697	1	0.705	150	138	22	28	
63	2 ¾	761 069 698	1	1.051	159	147	21	30	
63	2 ¾	761 069 699	1	1.177	161	146	21	30	
*	16	761 069 700	1	0.125	98	91	22	16	
*	20	761 069 701	1	0.116	102	95	24	16	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>