




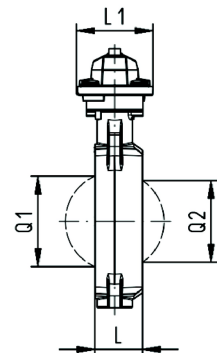

Wafer-style, intermediate installation butterfly valve type 567 PVC-U silicon free
With hand lever
Flange standard metric/ANSI/BS/JIS

Model:

- Silicone free/paint-compatible
- Overall length according to EN 558, ISO 5752
- Connecting dimension: ISO 7005 PN 10, EN 1092 PN 10, DIN 2501 PN 10, ANSI/ASME B 16.5 Class 150, BS 1560: 1989, BS 4504, JIS B 2220



d	Size	DN	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(L/min)						
63	2	50	10	740	161 567 402	1	1.040	161 567 422	1	1.044
75	2 1/2	65	10	1500	161 567 403	1	1.350	161 567 423	1	1.148
90	3	80	10	2400	161 567 404	1	1.517	161 567 424	1	1.315
110	4	100	10	3800	161 567 405	1	2.528	161 567 425	1	1.983
140	5	125	10	8600	161 567 406	1	2.536	161 567 426	1	3.339
160	6	150	10	11400	161 567 407	1	3.541	161 567 427	1	3.564
225	8	200	10	19900	161 567 408	1	5.513	161 567 428	1	5.541

d	d2	D	D1 min.	D1 max.	H	H1	H2	H3	L	L1	L2	Q1	Q2
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	104	19	120	125	264	77	134	54	45	106	205	40	
75	115	19	140	145	277	83	140	54	46	106	205	54	35
90	131	19	150	160	289	89	146	54	49	106	205	67	50
110	161	19	175	191	325	104	167	55	56	106	255	88	74
140	187	23	210	216	352	117	181	55	64	106	255	113	97
160	215	24	241	241	373	130	189	55	72	106	255	139	123
225	267	23	290	295	435	158	210	67	73	140	408	178	169

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>