


Variable area flow meter type 335
Float in PVDF with magnet
With solvent cement sockets PVC-U metric
O-rings in EPDM

Model:

- Standard guiding rod PVDF with stainless steel core (V4A) for DN50 and DN65

Option:

- 4-20 mA sensor
- Limit contacts
- Special scales for different media
- Union nuts and connecting parts in other materials on request

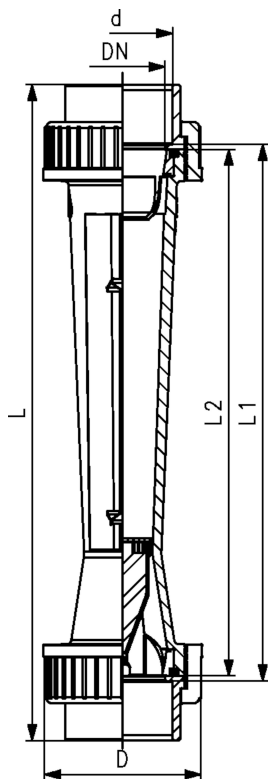

Scale range (l/h)	d (mm)	Size (inch)	DN (mm)	PVC-U transp. Code	Weight (kg)	Polyamid Code	Weight (kg)
50 - 500	32	1	25	199 335 100	0.469	199 335 120	0.434
100 - 1000	32	1	25	199 335 101	0.547	199 335 121	0.423
150 - 1500	40	1 1/4	32	199 335 102	0.630	199 335 122	0.568
250 - 2500	40	1 1/4	32	199 335 103	0.714	199 335 123	0.547
200 - 2000	50	1 1/2	40	199 335 104	0.973	199 335 124	0.887
300 - 3000	50	1 1/2	40	199 335 105	0.952	199 335 125	0.874
600 - 6000	50	1 1/2	40	199 335 106	1.024	199 335 126	0.836
600 - 6000	63	2	50	199 335 107	1.342	199 335 127	1.240
1000 - 10000	63	2	50	199 335 108	1.303	199 335 128	1.190
1500 - 15000	63	2	50	199 335 109	1.297	199 335 129	1.351
2000 - 20000	75	2 1/2	65	199 335 110	2.508	199 335 130	2.378
3000 - 30000	75	2 1/2	65	199 335 111	2.477	199 335 131	2.472
8000 - 60000	75	2 1/2	65	199 335 112	2.294	199 335 132	2.150

Scale range (l/h)	Polysulfone Code	Weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	G (inch)
50 - 500	199 335 140	0.466	58	385	341	335	1 1/2
100 - 1000	199 335 141	0.452	58	385	341	335	1 1/2
150 - 1500	199 335 142	0.604	72	393	341	335	2
250 - 2500	199 335 143	0.585	72	393	341	335	2
200 - 2000	199 335 144	0.944	83	403	341	335	2 1/4
300 - 3000	199 335 145	1.035	83	403	341	335	2 1/4
600 - 6000	199 335 146	0.881	83	403	341	335	2 1/4
600 - 6000	199 335 147	1.360	101	417	341	335	2 1/4
1000 - 10000	199 335 148	1.248	101	417	341	335	2 1/4
1500 - 15000	199 335 149	1.409	101	417	341	335	2 1/4
2000 - 20000	199 335 150	2.441	135	429	341	335	3 1/2
3000 - 30000	199 335 151	2.377	135	429	341	335	3 1/2
8000 - 60000	199 335 152	2.150	135	429	341	335	3 1/2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>