


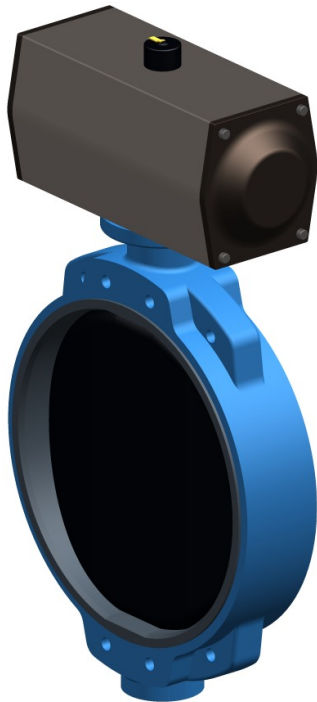

**Metal - butterfly valve type 039P DA (Double acting)
Without manual override DN350-1200 ANSI**

Model:

- Housing: Ductile Iron ASTM A 395, Epoxy coated
- Seatliner available in EPDM, FKM on request
- Disc available in Aluminium Bronze on request
- Up to DN 1200: Overall length according to EN 558, line 20, ISO 5752
- Connecting dimension: ANSI B 16.5 Class 150

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Disc: ductile iron: EPOXY coated EPDM Code	SP	Weight (kg)	Disc: stainless steel EPDM Code	SP	Weight (kg)
355	350	10	143360	198 039 220	1	43.000	198 039 230	1	43.000
400	400	10	186700	198 039 221	1	90.000	198 039 231	1	90.000
450	450	10	258390	198 039 222	1	112.000	198 039 232	1	112.000
500	500	10	316730	198 039 223	1	112.000	198 039 233	1	112.000
630	600	10	431750	198 039 224	1	187.000	198 039 234	1	187.000
700	700	10	618333	198 039 225	1	187.000	198 039 235	1	187.000
800	800	10	675000	198 039 226	1	289.000	198 039 236	1	289.000
900	900	10	1005200	198 039 227	1	980.000	198 039 237	1	980.000
1000	1000	10	1306930	198 039 228	1	980.000	198 039 238	1	980.000
1200	1200	10	1907050	198 039 229	1	980.000	198 039 239	1	980.000

d (mm)	Disc: ductile iron: EPOXY coated FKM Code	SP	Weight (kg)	Disc: stainless steel FKM Code	SP	Weight (kg)
355	198 039 260	1	43.000	198 039 270	1	43.000
400	198 039 261	1	90.000	198 039 271	1	90.000
450	198 039 262	1	112.000	198 039 272	1	112.000
500	198 039 263	1	112.000	198 039 273	1	112.000
630	198 039 264	1	187.000	198 039 274	1	187.000
700	198 039 265	1	187.000	198 039 275	1	187.000
800	198 039 266	1	289.000	198 039 276	1	289.000
900	198 039 267	1	980.000	198 039 277	1	980.000
1000	198 039 268	1	980.000	198 039 278	1	980.000
1200	198 039 269	1	980.000	198 039 279	1	980.000


d (mm)	Actuator unit type	D (mm)	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	L2 (mm)	Q1 (mm)	N (mm)	M (inch)
355	CH-B200	26	476	442	291	307	290	220	575	332	12	1
400	CH-B240	26	540	493	325	342	290	220	575	382	16	1
450	CH-B240	29	578	544	357	387	380	350	684	432	20	1 1/8
500	CH-B270	29	635	601	381	425	380	350	684	478	20	1 1/8
630	CH-B350	32	749	695	488	532	432	349	860	585	20	1 1/4
700	CH-B350	32	864	798	506	573	432	349	860	683	28	1 1/4

Data sheet

valid from: 7/4/17



d (mm)	Actuator unit type	D (mm)	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	L2 (mm)	Q1 (mm)	N (mm)	M (inch)
800	CH-B400	39	978	908	578	650	510	450	918	755	28	1 ½
900	CH-B500	39	1086	1004	643	707	700	640	1550	852	28	1 ½
1000	CH-B500	39	1200	1114	729	755	700	640	1550	958	32	1 ½
1200	CH-B500	39	1422	1330	855	900	700	640	1550	1098	44	1 ½

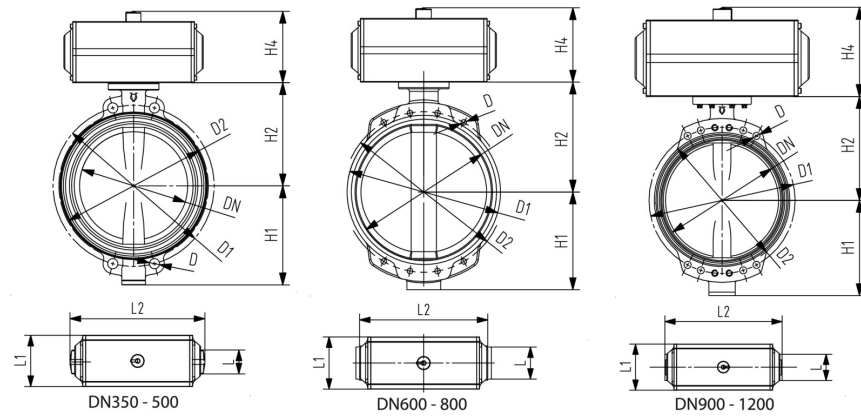

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>