


Diaphragm valve DIASTAR Six PVC-U
FC (Fail safe to close)
Unions with solvent cement sockets metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- For easy installation and removal
- Short overall length

Option:

- Individual configuration of the valve

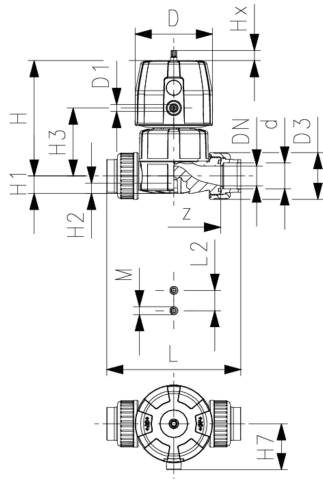

d	DN	Size	PN	kv-value	EPDM	SP	Weight	FKM	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code	(kg)
				(l/min)					
16	10	3/8	6	125	161 614 011	1	0.532		
25	20	3/4	6	271	161 614 013	1	1.009	800 047 328	1.760
32	25	1	6	481	161 614 014	1	1.246	800 047 329	1.259
40	32	1 1/4	6	759	161 614 015	1	2.112	800 047 330	3.760
50	40	1 1/2	6	960	161 614 016	1	2.618	800 047 331	2.782
63	50	2	6	1181	161 614 017	1	3.553	800 047 332	7.800

d	D	D1_G	H	H1	H2	H3	H7	L	L2	M	z	Lift =	closest
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	Hx	inch
												(mm)	(inch)
16	68	3/8	101	14	12	60	43	170	25	M6	142	7	3/8
25	96	3/4	132	18	12	73	57	152	25	M6	114	10	3/4
32	96	3/4	143	22	12	84	57	166	25	M6	122	13	1
40	120	1 1/4	173	26	15	99	69	192	45	M8	140	14	1 1/4
50	120	1 1/2	193	32	15	119	69	222	45	M8	160	16	1 1/2
63	120	2	205	39	15	132	69	266	45	M8	190	16	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>