



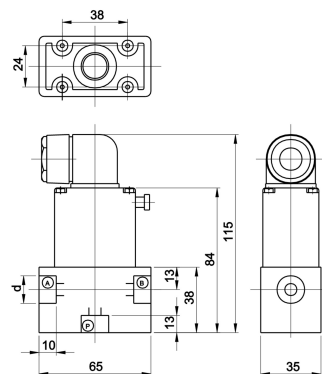

Solenoid valve type 157 PVC-U Straight-through valve 2/2 ways

Model:

- Material PVC-U: with threaded sockets parallel female thread Rp
- With manual override
- Electrical connection: cable plug
- Protection class IP 65
- Circuit function A: FC, closed in rest position
- Circuit function B: FO, opened in rest position

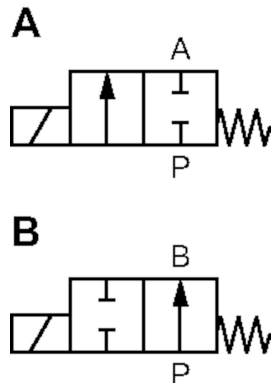

DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Inner Thread (inch)	Voltage	PN (bar)	Function
4	4	5.0	G3/8	24V DC	0 - 4	B
6	2	10.0	G3/8	24V DC	0 - 2	B
4	4	5.0	G3/8	230V 50Hz $\pm 10\%$	0 - 4	B
6	2	10.0	G3/8	230V 50Hz $\pm 10\%$	0 - 2	B
8	1	16.7	G3/8	230V 50Hz $\pm 10\%$	0 - 1	B
4	4	5.0	G3/8	24V DC	0 - 4	A
6	2	10.0	G3/8	24V DC	0 - 1	A
8	1	16.7	G3/8	24V AC/DC	0 - 1	A
4	4	5.0	G3/8	230V 50Hz $\pm 10\%$	0 - 4	A
6	2	10.0	G3/8	230V 50Hz $\pm 10\%$	0 - 2	A
8	1	16.7	G3/8	230V 50Hz $\pm 10\%$	0 - 1	A

DN (mm)	EPDM Code	FKM Code	Inch (inch)
4	199 157 647		
6	199 157 648		G3/8
4	199 157 027	199 157 022	G3/8
6	199 157 028		
8	199 157 029		
4	199 157 627	199 157 622	
6	199 157 628	199 157 623	
8	199 157 629	199 157 624	
4	199 157 007	199 157 002	
6	199 157 008	199 157 003	
8	199 157 009	199 157 004	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>