




## Ventilating and bleed valve Type 591 PVC-U With solvent cement spigots metric

### Model:

- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Floater made of PP-H
- Designed for easy installation and removal
- Compact installation length

| d<br>(mm) | DN<br>(mm) | PN<br>(bar) | EPDM<br>Code | FKM<br>Code | D<br>(mm) | L<br>(mm) | t<br>(mm) | closest<br>inch<br>(inch) |
|-----------|------------|-------------|--------------|-------------|-----------|-----------|-----------|---------------------------|
| 16        | 10         | 16          | 161 591 041  | 161 591 051 | 50        | 129       | 14        | 3/8                       |
| 20        | 15         | 16          | 161 591 042  | 161 591 052 | 50        | 139       | 16        | 1/2                       |
| 25        | 20         | 16          | 161 591 043  | 161 591 053 | 58        | 160       | 19        | 3/4                       |
| 32        | 25         | 16          | 161 591 044  | 161 591 054 | 68        | 172       | 22        | 1                         |
| 40        | 32         | 16          | 161 591 045  | 161 591 055 | 84        | 193       | 26        | 1 1/4                     |
| 50        | 40         | 16          | 161 591 046  | 161 591 056 | 97        | 215       | 31        | 1 1/2                     |
| 63        | 50         | 16          | 161 591 047  | 161 591 057 | 124       | 249       | 38        | 2                         |
| 75        | 65         | 16          | 161 591 048  | 161 591 058 | 166       | 284       | 44        | 2 1/2                     |
| 90        | 80         | 16          | 161 591 049  | 161 591 059 | 200       | 300       | 52        | 3                         |
| 110       | 100        | 16          | 161 591 050  | 161 591 060 | 238       | 340       | 61        | 4                         |

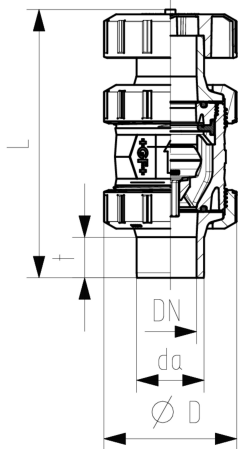

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>